

Micro-V® Belts

Listed by Number

Showing Our Belt Numbers with Corresponding
Nominal Outside Lengths, Top Widths and Angles

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
DK060472	*47 5/8 (1210)	27/32 (21)	40°	K040384	39 (990)	9/16 (14)	40°
DK060519	*52 9/16 (1335)	27/32 (21)	40°	K040385	39 1/8 (993)	9/16 (14)	40°
DK060718	*72 1/4 (1835)	27/32 (21)	40°	K040388	39 3/8 (999)	9/16 (14)	40°
DK060725	*72 3/4 (1848)	27/32 (21)	40°	K040390	39 3/4 (1008)	9/16 (14)	40°
DK060729	*73 11/32 (1863)	27/32 (21)	40°	K040395	40 1/4 (1021)	9/16 (14)	40°
DK070536	*54 1/16 (1373)	1 (25)	40°	K040398	40 3/8 (1027)	9/16 (14)	40°
DK070551	*55 17/32 (1410)	1 (25)	40°	K040399	40 5/8 (1031)	9/16 (14)	40°
H040790	79 3/8 (2015)	1/4 (6)	40°	K040400	40 3/4 (1034)	9/16 (14)	40°
H040920	92 3/8 (2345)	1/4 (6)	40°	K040405	41 1/4 (1047)	9/16 (14)	40°
H050920	92 3/8 (2345)	5/16 (8)	40°	K040410	41 3/4 (1059)	9/16 (14)	40°
H051000	100 3/8 (2550)	5/16 (8)	40°	K040413	42 1/8 (1068)	9/16 (14)	40°
J060293	29 3/4 (755)	9/16 (14)	40°	K040418	42 3/8 (1076)	9/16 (14)	40°
J060328	33 1/2 (850)	9/16 (14)	40°	K040420	42 5/8 (1084)	9/16 (14)	40°
K030195	19 7/8 (505)	13/32 (11)	40°	K040425	43 1/8 (1095)	9/16 (14)	40°
K030220	22 5/8 (576)	13/32 (11)	40°	K040430	43 3/4 (1111)	9/16 (14)	40°
K030236	24 1/4 (615)	13/32 (11)	40°	K040438	44 3/8 (1128)	9/16 (14)	40°
K030240	24 3/4 (629)	13/32 (11)	40°	K040440	44 3/4 (1135)	9/16 (14)	40°
K030245	25 1/4 (640)	13/32 (11)	40°	K040445	45 1/8 (1148)	9/16 (14)	40°
K030250	25 3/4 (654)	13/32 (11)	40°	K040450	45 5/8 (1160)	9/16 (14)	40°
K030265	27 1/8 (689)	13/32 (11)	40°	K040460	46 5/8 (1186)	9/16 (14)	40°
K030267	27 3/8 (695)	13/32 (11)	40°	K040465	47 (1195)	9/16 (14)	40°
K030280	28 3/4 (730)	13/32 (11)	40°	K040470	47 5/8 (1211)	9/16 (14)	40°
K030290	29 3/4 (755)	13/32 (11)	40°	K040476	48 1/8 (1223)	9/16 (14)	40°
K030295	30 1/8 (765)	13/32 (11)	40°	K040490	49 1/2 (1258)	9/16 (14)	40°
K030299	30 1/2 (775)	13/32 (11)	40°	K040500	50 5/8 (1286)	9/16 (14)	40°
K030300	30 3/4 (781)	13/32 (11)	40°	K040506	51 1/8 (1300)	9/16 (14)	40°
K030310	31 5/8 (805)	13/32 (11)	40°	K040510	51 1/2 (1309)	9/16 (14)	40°
K030323	32 7/8 (836)	13/32 (11)	40°	K040514	52 (1320)	9/16 (14)	40°
K030328	33 1/2 (850)	13/32 (11)	40°	K040517	52 1/8 (1325)	9/16 (14)	40°
K030334	34 (864)	13/32 (11)	40°	K040520	52 5/8 (1338)	9/16 (14)	40°
K030340	34 5/8 (881)	13/32 (11)	40°	K040525	53 1/8 (1351)	9/16 (14)	40°
K030350	35 5/8 (906)	13/32 (11)	40°	K040529	53 1/2 (1360)	9/16 (14)	40°
K030365	37 1/8 (943)	13/32 (11)	40°	K040535	54 (1373)	9/16 (14)	40°
K030384	39 1/8 (993)	13/32 (11)	40°	K040545	55 1/8 (1399)	9/16 (14)	40°
K030390	39 3/4 (1008)	13/32 (11)	40°	K040551	55 3/4 (1415)	9/16 (14)	40°
K030395	40 1/4 (1021)	13/32 (11)	40°	K040560	56 1/2 (1436)	9/16 (14)	40°
K030415	42 1/8 (1068)	13/32 (11)	40°	K040575	58 1/8 (1475)	9/16 (14)	40°
K030425	43 1/8 (1095)	13/32 (11)	40°	K040595	60 (1523)	9/16 (14)	40°
K030441	44 3/4 (1135)	13/32 (11)	40°	K040635	64 1/8 (1627)	9/16 (14)	40°
K030455	46 (1170)	13/32 (11)	40°	K040685	69 1/8 (1756)	9/16 (14)	40°
K040233	24 1/2 (622)	9/16 (14)	40°	K040745	75 1/8 (1907)	9/16 (14)	40°
K040245	25 1/4 (640)	9/16 (14)	40°	K040762	76 7/8 (1951)	9/16 (14)	40°
K040250	25 3/4 (654)	9/16 (14)	40°	K040882	88 3/4 (2255)	9/16 (14)	40°
K040270	27 3/4 (704)	9/16 (14)	40°	K040940	94 5/8 (2403)	9/16 (14)	40°
K040274	28 (710)	9/16 (14)	40°	K050200	20 3/4 (527)	21/32 (17)	40°
K040275	28 1/4 (717)	9/16 (14)	40°	K050275	28 1/4 (717)	21/32 (17)	40°
K040285	29 1/4 (742)	9/16 (14)	40°	K050280	28 3/4 (730)	21/32 (17)	40°
K040292	29 3/4 (755)	9/16 (14)	40°	K050290	29 3/4 (755)	21/32 (17)	40°
K040300	30 3/4 (781)	9/16 (14)	40°	K050316	32 1/4 (818)	21/32 (17)	40°
K040305	31 1/4 (793)	9/16 (14)	40°	K050317	32 1/2 (824)	21/32 (17)	40°
K040310	31 3/4 (805)	9/16 (14)	40°	K050323	33 (837)	21/32 (17)	40°
K040315	32 1/4 (818)	9/16 (14)	40°	K050330	33 3/4 (856)	21/32 (17)	40°
K040319	32 1/2 (824)	9/16 (14)	40°	K050335	34 (864)	21/32 (17)	40°
K040320	32 3/4 (831)	9/16 (14)	40°	K050336	34 3/8 (872)	21/32 (17)	40°
K040322	32 7/8 (836)	9/16 (14)	40°	K050340	34 5/8 (881)	21/32 (17)	40°
K040325	33 1/4 (844)	9/16 (14)	40°	K050344	35 (875)	21/32 (17)	40°
K040329	33 3/8 (849)	9/16 (14)	40°	K050345	35 1/4 (894)	21/32 (17)	40°
K040330	33 3/4 (856)	9/16 (14)	40°	K050350	35 5/8 (906)	21/32 (17)	40°
K040332	33 3/4 (858)	9/16 (14)	40°	K050355	36 1/8 (918)	21/32 (17)	40°
K040335	34 (864)	9/16 (14)	40°	K050360	36 3/4 (932)	21/32 (17)	40°
K040338	34 3/8 (874)	9/16 (14)	40°	K050365	37 1/8 (943)	21/32 (17)	40°
K040340	34 5/8 (881)	9/16 (14)	40°	K050368	37 3/8 (949)	21/32 (17)	40°
K040343	34 7/8 (885)	9/16 (14)	40°	K050370	37 3/4 (957)	21/32 (17)	40°
K040345	35 (889)	9/16 (14)	40°	K050375	38 1/4 (970)	21/32 (17)	40°
K040347	35 3/8 (897)	9/16 (14)	40°	K050380	38 3/4 (983)	21/32 (17)	40°
K040350	35 5/8 (906)	9/16 (14)	40°	K050385	39 1/4 (996)	21/32 (17)	40°
K040353	35 7/8 (912)	9/16 (14)	40°	K050390	39 3/4 (1008)	21/32 (17)	40°
K040355	36 1/8 (918)	9/16 (14)	40°	K050396	40 1/4 (1021)	21/32 (17)	40°
K040358	36 3/8 (924)	9/16 (14)	40°	K050398	40 3/8 (1027)	21/32 (17)	40°
K040360	36 3/4 (932)	9/16 (14)	40°	K050400	40 5/8 (1031)	21/32 (17)	40°
K040365	37 1/8 (943)	9/16 (14)	40°	K050402	40 3/4 (1035)	21/32 (17)	40°
K040370	37 1/2 (954)	9/16 (14)	40°	K050405	41 1/4 (1047)	21/32 (17)	40°
K040372	38 (964)	9/16 (14)	40°	K050410	41 3/4 (1059)	21/32 (17)	40°
K040378	38 1/2 (977)	9/16 (14)	40°	K050415	42 1/8 (1068)	21/32 (17)	40°
K040382	38 3/4 (983)	9/16 (14)	40°	K050418	42 3/8 (1076)	21/32 (17)	40°

(mm) Millimeters

* Dual Sided Belt

Micro-V® Belts Listed by Number

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
K050420	42 5/8 (1084)	21/32 (17)	40°	K060439	44 1/2 (1129)	13/16 (20)	40°
K050425	43 1/8 (1095)	21/32 (17)	40°	K060441	44 3/4 (1135)	13/16 (20)	40°
K050429	43 1/2 (1103)	21/32 (17)	40°	K060445	45 1/8 (1148)	13/16 (20)	40°
K050433	43 3/4 (1113)	21/32 (17)	40°	K060450	45 5/8 (1160)	13/16 (20)	40°
K050435	44 1/8 (1122)	21/32 (17)	40°	K060455	46 (1170)	13/16 (20)	40°
K050440	44 3/4 (1135)	21/32 (17)	40°	K060458	46 3/8 (1179)	13/16 (20)	40°
K050446	45 1/8 (1148)	21/32 (17)	40°	K060461	46 5/8 (1186)	13/16 (20)	40°
K050450	45 5/8 (1160)	21/32 (17)	40°	K060465	47 (1195)	13/16 (20)	40°
K050455	46 (1170)	21/32 (17)	40°	K060468	47 3/8 (1204)	13/16 (20)	40°
K050459	46 3/8 (1179)	21/32 (17)	40°	K060470	47 5/8 (1211)	13/16 (20)	40°
K050460	46 5/8 (1186)	21/32 (17)	40°	K060473	47 7/8 (1216)	13/16 (20)	40°
K050470	47 5/8 (1211)	21/32 (17)	40°	K060478	48 1/4 (1227)	13/16 (20)	40°
K050474	47 7/8 (1218)	21/32 (17)	40°	K060480	48 5/8 (1237)	13/16 (20)	40°
K050478	48 3/8 (1228)	21/32 (17)	40°	K060483	48 7/8 (1241)	13/16 (20)	40°
K050480	48 5/8 (1237)	21/32 (17)	40°	K060486	49 1/8 (1248)	13/16 (20)	40°
K050486	49 1/8 (1249)	21/32 (17)	40°	K060490	49 1/2 (1258)	13/16 (20)	40°
K050490	49 1/2 (1258)	21/32 (17)	40°	K060495	50 1/8 (1274)	13/16 (20)	40°
K050500	50 5/8 (1286)	21/32 (17)	40°	K060500	50 3/4 (1288)	13/16 (20)	40°
K050505	51 (1297)	21/32 (17)	40°	K060505	51 (1297)	13/16 (20)	40°
K050507	51 1/8 (1300)	21/32 (17)	40°	K060507	51 1/8 (1300)	13/16 (20)	40°
K050510	51 3/4 (1315)	21/32 (17)	40°	K060509	51 1/2 (1309)	13/16 (20)	40°
K050516	52 1/4 (1327)	21/32 (17)	40°	K060512	51 3/4 (1315)	13/16 (20)	40°
K050520	52 5/8 (1338)	21/32 (17)	40°	K060516	52 1/8 (1325)	13/16 (20)	40°
K050523	52 7/8 (1343)	21/32 (17)	40°	K060520	52 3/4 (1339)	13/16 (20)	40°
K050530	53 1/2 (1359)	21/32 (17)	40°	K060523	52 7/8 (1342)	13/16 (20)	40°
K050532	53 7/8 (1367)	21/32 (17)	40°	K060525	53 3/8 (1355)	13/16 (20)	40°
K050538	54 3/8 (1380)	21/32 (17)	40°	K060529	53 1/2 (1359)	13/16 (20)	40°
K050545	55 1/4 (1404)	21/32 (17)	40°	K060532	53 7/8 (1367)	13/16 (20)	40°
K050551	55 3/4 (1415)	21/32 (17)	40°	K060535	54 1/4 (1379)	13/16 (20)	40°
K050565	57 (1448)	21/32 (17)	40°	K060539	54 1/2 (1385)	13/16 (20)	40°
K050570	57 1/2 (1462)	21/32 (17)	40°	K060547	55 1/4 (1404)	13/16 (20)	40°
K050586	59 1/4 (1504)	21/32 (17)	40°	K060551	55 3/4 (1415)	13/16 (20)	40°
K050609	61 1/2 (1563)	21/32 (17)	40°	K060555	56 (1423)	13/16 (20)	40°
K050625	63 1/8 (1603)	21/32 (17)	40°	K060557	56 1/4 (1429)	13/16 (20)	40°
K050630	63 5/8 (1616)	21/32 (17)	40°	K060559	56 1/2 (1436)	13/16 (20)	40°
K050635	64 1/8 (1627)	21/32 (17)	40°	K060560	56 5/8 (1439)	13/16 (20)	40°
K050640	64 5/8 (1642)	21/32 (17)	40°	K060563	56 7/8 (1445)	13/16 (20)	40°
K050644	65 (1651)	21/32 (17)	40°	K060569	57 1/2 (1462)	13/16 (20)	40°
K050647	65 1/4 (1657)	21/32 (17)	40°	K060573	57 7/8 (1471)	13/16 (20)	40°
K050650	65 5/8 (1667)	21/32 (17)	40°	K060575	58 (1473)	13/16 (20)	40°
K050653	65 7/8 (1675)	21/32 (17)	40°	K060578	58 3/8 (1483)	13/16 (20)	40°
K050658	66 3/8 (1687)	21/32 (17)	40°	K060586	59 1/4 (1504)	13/16 (20)	40°
K050660	66 3/4 (1696)	21/32 (17)	40°	K060594	60 (1523)	13/16 (20)	40°
K050665	67 1/8 (1704)	21/32 (17)	40°	K060598	60 3/8 (1534)	13/16 (20)	40°
K050690	69 3/4 (1772)	21/32 (17)	40°	K060602	60 3/4 (1542)	13/16 (20)	40°
K050705	71 1/8 (1807)	21/32 (17)	40°	K060604	60 7/8 (1547)	13/16 (20)	40°
K050715	72 1/8 (1831)	21/32 (17)	40°	K060605	61 1/8 (1553)	13/16 (20)	40°
K050720	72 5/8 (1845)	21/32 (17)	40°	K060609	61 1/2 (1563)	13/16 (20)	40°
K050750	75 3/8 (1914)	21/32 (17)	40°	K060612	61 3/4 (1569)	13/16 (20)	40°
K050755	76 (1932)	21/32 (17)	40°	K060615	62 1/8 (1577)	13/16 (20)	40°
K050757	76 1/4 (1937)	21/32 (17)	40°	K060620	62 5/8 (1591)	13/16 (20)	40°
K050778	78 3/8 (1989)	21/32 (17)	40°	K060623	62 7/8 (1598)	13/16 (20)	40°
K050817	82 1/2 (2096)	21/32 (17)	40°	K060625	63 1/8 (1603)	13/16 (20)	40°
K050825	83 1/8 (2112)	21/32 (17)	40°	K060630	63 5/8 (1616)	13/16 (20)	40°
K050835	84 (2134)	21/32 (17)	40°	K060635	64 1/8 (1627)	13/16 (20)	40°
K050836	84 1/8 (2138)	21/32 (17)	40°	K060637	64 3/8 (1634)	13/16 (20)	40°
K050845	85 1/8 (2164)	21/32 (17)	40°	K060640	64 5/8 (1642)	13/16 (20)	40°
K050855	86 1/8 (2187)	21/32 (17)	40°	K060642	64 3/4 (1646)	13/16 (20)	40°
K050887	89 1/8 (2265)	21/32 (17)	40°	K060645	65 (1651)	13/16 (20)	40°
K060288	29 1/2 (748)	13/16 (20)	40°	K060650	65 1/2 (1665)	13/16 (20)	40°
K060295	30 1/8 (765)	13/16 (20)	40°	K060653	65 7/8 (1674)	13/16 (20)	40°
K060305	31 1/4 (793)	13/16 (20)	40°	K060658	66 3/8 (1687)	13/16 (20)	40°
K060325	33 1/4 (844)	13/16 (20)	40°	K060660	66 3/4 (1696)	13/16 (20)	40°
K060331	33 3/4 (856)	13/16 (20)	40°	K060663	66 7/8 (1699)	13/16 (20)	40°
K060338	34 3/8 (873)	13/16 (20)	40°	K060667	67 1/4 (1708)	13/16 (20)	40°
K060340	34 3/4 (881)	13/16 (20)	40°	K060670	67 1/2 (1716)	13/16 (20)	40°
K060345	35 1/4 (894)	13/16 (20)	40°	K060672	67 3/4 (1722)	13/16 (20)	40°
K060355	36 1/8 (918)	13/16 (20)	40°	K060675	68 (1728)	13/16 (20)	40°
K060365	37 1/8 (943)	13/16 (20)	40°	K060680	68 5/8 (1742)	13/16 (20)	40°
K060370	37 3/4 (957)	13/16 (20)	40°	K060682	68 7/8 (1750)	13/16 (20)	40°
K060374	38 (964)	13/16 (20)	40°	K060685	69 1/8 (1756)	13/16 (20)	40°
K060380	38 3/4 (983)	13/16 (20)	40°	K060690	69 5/8 (1767)	13/16 (20)	40°
K060385	39 1/8 (993)	13/16 (20)	40°	K060695	70 (1777)	13/16 (20)	40°
K060388	39 3/8 (999)	13/16 (20)	40°	K060696	70 1/4 (1783)	13/16 (20)	40°
K060390	39 3/4 (1008)	13/16 (20)	40°	K060703	70 7/8 (1799)	13/16 (20)	40°
K060400	40 3/4 (1034)	13/16 (20)	40°	K060705	71 1/8 (1807)	13/16 (20)	40°
K060405	41 (1043)	13/16 (20)	40°	K060710	71 1/2 (1816)	13/16 (20)	40°
K060407	41 3/8 (1050)	13/16 (20)	40°	K060716	72 (1830)	13/16 (20)	40°
K060408	41 1/2 (1054)	13/16 (20)	40°	K060721	72 5/8 (1845)	13/16 (20)	40°
K060410	41 3/4 (1059)	13/16 (20)	40°	K060722	72 3/4 (1848)	13/16 (20)	40°
K060415	42 1/8 (1069)	13/16 (20)	40°	K060725	73 1/4 (1859)	13/16 (20)	40°
K060420	42 1/2 (1081)	13/16 (20)	40°	K060730	73 1/2 (1867)	13/16 (20)	40°
K060423	42 7/8 (1089)	13/16 (20)	40°	K060733	73 7/8 (1876)	13/16 (20)	40°
K060425	43 1/8 (1095)	13/16 (20)	40°	K060735	74 1/8 (1881)	13/16 (20)	40°
K060427	43 1/2 (1103)	13/16 (20)	40°	K060739	74 1/2 (1893)	13/16 (20)	40°
K060431	43 3/4 (1111)	13/16 (20)	40°	K060744	75 (1904)	13/16 (20)	40°
K060434	43 7/8 (1116)	13/16 (20)	40°	K060747	75 3/8 (1914)	13/16 (20)	40°
K060435	44 1/8 (1122)	13/16 (20)	40°	K060750	75 5/8 (1921)	13/16 (20)	40°

(mm) Millimeters

* Dual Sided Belt

Micro-V® Belts Listed by Number

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
K060755	76 (1932)	13/16 (20)	40°	K061123	112 7/8 (2869)	13/16 (20)	40°
K060760	76 1/2 (1942)	13/16 (20)	40°	K061130	113 5/8 (2886)	13/16 (20)	40°
K060763	76 7/8 (1951)	13/16 (20)	40°	K061140	114 1/2 (2910)	13/16 (20)	40°
K060770	77 3/8 (1967)	13/16 (20)	40°	K061145	115 1/4 (2927)	13/16 (20)	40°
K060772	77 7/8 (1977)	13/16 (20)	40°	K061177	118 1/4 (3005)	13/16 (20)	40°
K060775	78 (1982)	13/16 (20)	40°	K061187	119 1/4 (3030)	13/16 (20)	40°
K060780	78 5/8 (1996)	13/16 (20)	40°	K061195	120 1/8 (3051)	13/16 (20)	40°
K060785	79 (2007)	13/16 (20)	40°	K061203	120 7/8 (3069)	13/16 (20)	40°
K060790	79 1/2 (2018)	13/16 (20)	40°	K061306	136 5/8 (3470)	13/16 (20)	40°
K060795	80 1/8 (2034)	13/16 (20)	40°	K070319	32 1/2 (824)	15/16 (24)	40°
K060798	80 3/8 (2040)	13/16 (20)	40°	K070362	36 7/8 (936)	15/16 (24)	40°
K060802	80 3/4 (2051)	13/16 (20)	40°	K070370	37 3/4 (957)	15/16 (24)	40°
K060806	81 1/8 (2061)	13/16 (20)	40°	K070390	39 3/4 (1008)	15/16 (24)	40°
K060810	81 5/8 (2073)	13/16 (20)	40°	K070425	43 1/8 (1095)	15/16 (24)	40°
K060815	82 1/8 (2085)	13/16 (20)	40°	K070505	51 1/8 (1300)	15/16 (24)	40°
K060820	82 1/2 (2096)	13/16 (20)	40°	K070553	55 7/8 (1418)	15/16 (24)	40°
K060825	83 1/8 (2112)	13/16 (20)	40°	K070622	62 3/4 (1594)	15/16 (24)	40°
K060827	83 1/4 (2116)	13/16 (20)	40°	K070628	63 3/8 (1609)	15/16 (24)	40°
K060832	83 3/4 (2127)	13/16 (20)	40°	K070630	63 5/8 (1616)	15/16 (24)	40°
K060837	84 1/4 (2140)	13/16 (20)	40°	K070640	64 5/8 (1642)	15/16 (24)	40°
K060840	84 1/2 (2147)	13/16 (20)	40°	K070653	65 7/8 (1675)	15/16 (24)	40°
K060845	85 1/4 (2165)	13/16 (20)	40°	K070673	67 3/4 (1722)	15/16 (24)	40°
K060849	85 1/2 (2171)	13/16 (20)	40°	K070677	68 1/4 (1734)	15/16 (24)	40°
K060854	85 7/8 (2182)	13/16 (20)	40°	K070680	68 5/8 (1743)	15/16 (24)	40°
K060858	86 3/8 (2193)	13/16 (20)	40°	K070683	68 7/8 (1750)	15/16 (24)	40°
K060860	86 5/8 (2201)	13/16 (20)	40°	K070685	69 1/8 (1756)	15/16 (24)	40°
K060863	86 7/8 (2206)	13/16 (20)	40°	K070694	70 (1779)	15/16 (24)	40°
K060864	86 7/8 (2208)	13/16 (20)	40°	K070701	70 3/4 (1796)	15/16 (24)	40°
K060866	87 1/4 (2216)	13/16 (20)	40°	K070705	71 1/8 (1807)	15/16 (24)	40°
K060868	87 3/8 (2219)	13/16 (20)	40°	K070709	71 1/2 (1816)	15/16 (24)	40°
K060870	87 5/8 (2225)	13/16 (20)	40°	K070733	73 3/4 (1874)	15/16 (24)	40°
K060874	87 7/8 (2233)	13/16 (20)	40°	K070735	74 1/8 (1883)	15/16 (24)	40°
K060875	88 1/8 (2238)	13/16 (20)	40°	K070763	76 7/8 (1951)	15/16 (24)	40°
K060876	88 1/8 (2239)	13/16 (20)	40°	K070776	78 (1982)	15/16 (24)	40°
K060878	88 3/8 (2245)	13/16 (20)	40°	K070786	79 1/8 (2011)	15/16 (24)	40°
K060882	88 7/8 (2257)	13/16 (20)	40°	K070825	83 1/8 (2112)	15/16 (24)	40°
K060883	88 7/8 (2257)	13/16 (20)	40°	K070834	84 (2133)	15/16 (24)	40°
K060888	89 1/2 (2273)	13/16 (20)	40°	K070835	84 (2134)	15/16 (24)	40°
K060891	89 3/4 (2278)	13/16 (20)	40°	K070855	86 1/8 (2187)	15/16 (24)	40°
K060895	90 1/8 (2289)	13/16 (20)	40°	K070873	87 7/8 (2232)	15/16 (24)	40°
K060900	90 5/8 (2301)	13/16 (20)	40°	K070880	88 1/2 (2249)	15/16 (24)	40°
K060905	90 7/8 (2308)	13/16 (20)	40°	K070882	88 3/4 (2255)	15/16 (24)	40°
K060908	91 1/4 (2318)	13/16 (20)	40°	K070885	89 1/8 (2263)	15/16 (24)	40°
K060910	91 5/8 (2329)	13/16 (20)	40°	K070886	89 1/8 (2265)	15/16 (24)	40°
K060915	92 1/8 (2340)	13/16 (20)	40°	K070890	89 3/4 (2278)	15/16 (24)	40°
K060919	92 3/8 (2347)	13/16 (20)	40°	K070896	90 1/8 (2289)	15/16 (24)	40°
K060923	92 7/8 (2360)	13/16 (20)	40°	K070901	90 5/8 (2301)	15/16 (24)	40°
K060926	93 1/8 (2364)	13/16 (20)	40°	K070903	90 7/8 (2308)	15/16 (24)	40°
K060930	93 5/8 (2377)	13/16 (20)	40°	K070905	91 1/8 (2314)	15/16 (24)	40°
K060935	94 (2387)	13/16 (20)	40°	K070916	92 1/4 (2343)	15/16 (24)	40°
K060938	94 1/2 (2400)	13/16 (20)	40°	K070922	92 3/4 (2357)	15/16 (24)	40°
K060942	94 3/4 (2407)	13/16 (20)	40°	K070924	93 (2362)	15/16 (24)	40°
K060945	95 1/8 (2415)	13/16 (20)	40°	K070931	93 5/8 (2378)	15/16 (24)	40°
K060947	95 1/4 (2419)	13/16 (20)	40°	K070951	95 3/4 (2431)	15/16 (24)	40°
K060950	95 5/8 (2428)	13/16 (20)	40°	K070975	97 3/4 (2484)	15/16 (24)	40°
K060956	96 1/8 (2440)	13/16 (20)	40°	K070976	98 1/8 (2492)	15/16 (24)	40°
K060960	96 5/8 (2452)	13/16 (20)	40°	K071005	101 1/8 (2568)	15/16 (24)	40°
K060962	96 7/8 (2460)	13/16 (20)	40°	K071009	101 3/8 (2576)	15/16 (24)	40°
K060966	97 1/8 (2468)	13/16 (20)	40°	K071013	101 7/8 (2586)	15/16 (24)	40°
K060970	97 5/8 (2479)	13/16 (20)	40°	K071031	103 5/8 (2633)	15/16 (24)	40°
K060975	98 1/8 (2492)	13/16 (20)	40°	K071037	104 1/4 (2649)	15/16 (24)	40°
K060980	98 5/8 (2505)	13/16 (20)	40°	K071040	104 5/8 (2656)	15/16 (24)	40°
K060984	99 (2513)	13/16 (20)	40°	K071045	105 1/8 (2671)	15/16 (24)	40°
K060988	99 1/2 (2526)	13/16 (20)	40°	K071056	106 1/4 (2699)	15/16 (24)	40°
K060990	99 5/8 (2531)	13/16 (20)	40°	K071130	113 5/8 (2886)	15/16 (24)	40°
K060994	99 7/8 (2537)	13/16 (20)	40°	K071134	114 (2897)	15/16 (24)	40°
K060997	100 1/4 (2546)	13/16 (20)	40°	K071141	114 5/8 (2912)	15/16 (24)	40°
K061000	100 5/8 (2555)	13/16 (20)	40°	K071150	115 5/8 (2936)	15/16 (24)	40°
K061005	101 1/8 (2568)	13/16 (20)	40°	K071157	116 1/4 (2953)	15/16 (24)	40°
K061010	101 5/8 (2581)	13/16 (20)	40°	K071194	119 7/8 (3046)	15/16 (24)	40°
K061015	102 1/8 (2593)	13/16 (20)	40°	K071247	125 3/8 (3183)	15/16 (24)	40°
K061020	102 5/8 (2605)	13/16 (20)	40°	K080300	30 3/4 (781)	1 3/32 (28)	40°
K061025	103 (2615)	13/16 (20)	40°	K080330	33 3/4 (856)	1 3/32 (28)	40°
K061031	103 5/8 (2633)	13/16 (20)	40°	K080360	36 3/4 (932)	1 3/32 (28)	40°
K061033	103 7/8 (2639)	13/16 (20)	40°	K080365	37 1/8 (943)	1 3/32 (28)	40°
K061037	104 1/4 (2649)	13/16 (20)	40°	K080370	37 3/4 (957)	1 3/32 (28)	40°
K061045	105 (2666)	13/16 (20)	40°	K080375	38 1/8 (968)	1 3/32 (28)	40°
K061058	106 3/8 (2701)	13/16 (20)	40°	K080382	38 3/4 (983)	1 3/32 (28)	40°
K061066	107 1/8 (2722)	13/16 (20)	40°	K080384	39 (990)	1 3/32 (28)	40°
K061073	107 7/8 (2741)	13/16 (20)	40°	K080390	39 3/4 (1008)	1 3/32 (28)	40°
K061075	108 1/8 (2746)	13/16 (20)	40°	K080392	39 7/8 (1014)	1 3/32 (28)	40°
K061080	108 3/4 (2761)	13/16 (20)	40°	K080400	40 3/4 (1034)	1 3/32 (28)	40°
K061098	109 3/8 (2780)	13/16 (20)	40°	K080408	41 3/8 (1051)	1 3/32 (28)	40°
K061105	111 1/8 (2824)	13/16 (20)	40°	K080415	42 1/8 (1069)	1 3/32 (28)	40°
K061110	111 5/8 (2835)	13/16 (20)	40°	K080427	43 1/2 (1103)	1 3/32 (28)	40°
K061114	111 7/8 (2841)	13/16 (20)	40°	K080435	44 1/8 (1122)	1 3/32 (28)	40°
K061115	111 7/8 (2841)	13/16 (20)	40°	K080450	45 5/8 (1160)	1 3/32 (28)	40°
K061120	112 1/2 (2859)	13/16 (20)	40°	K080455	46 (1170)	1 3/32 (28)	40°

(mm) Millimeters

* Dual Sided Belt

Micro-V® Belts Listed by Number

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
K080458	46 3/8 (1179)	1 3/32 (28)	40°	K080934	93 7/8 (2384)	1 3/32 (28)	40°
K080465	47 (1195)	1 3/32 (28)	40°	K080939	94 1/2 (2400)	1 3/32 (28)	40°
K080471	47 3/4 (1211)	1 3/32 (28)	40°	K080944	95 (2412)	1 3/32 (28)	40°
K080485	49 1/8 (1249)	1 3/32 (28)	40°	K080952	95 3/4 (2432)	1 3/32 (28)	40°
K080491	49 5/8 (1260)	1 3/32 (28)	40°	K080968	97 1/2 (2475)	1 3/32 (28)	40°
K080496	50 1/8 (1274)	1 3/32 (28)	40°	K080981	98 5/8 (2505)	1 3/32 (28)	40°
K080505	51 (1297)	1 3/32 (28)	40°	K080986	99 1/8 (2519)	1 3/32 (28)	40°
K080510	51 1/2 (1309)	1 3/32 (28)	40°	K080991	99 5/8 (2531)	1 3/32 (28)	40°
K080514	52 (1320)	1 3/32 (28)	40°	K081000	100 5/8 (2555)	1 3/32 (28)	40°
K080525	53 1/8 (1351)	1 3/32 (28)	40°	K081005	101 1/8 (2568)	1 3/32 (28)	40°
K080530	53 1/2 (1359)	1 3/32 (28)	40°	K081020	102 5/8 (2605)	1 3/32 (28)	40°
K080537	54 1/4 (1379)	1 3/32 (28)	40°	K081023	102 7/8 (2613)	1 3/32 (28)	40°
K080545	55 1/8 (1399)	1 3/32 (28)	40°	K081035	104 (2642)	1 3/32 (28)	40°
K080550	55 3/4 (1415)	1 3/32 (28)	40°	K081074	108 (2745)	1 3/32 (28)	40°
K080558	56 1/4 (1429)	1 3/32 (28)	40°	K081079	108 1/2 (2756)	1 3/32 (28)	40°
K080560	56 5/8 (1439)	1 3/32 (28)	40°	K081088	109 3/8 (27)	1 3/32 (28)	40°
K080565	57 (1448)	1 3/32 (28)	40°	K081092	109 3/4 (2788)	1 3/32 (28)	40°
K080566	57 1/8 (1452)	1 3/32 (28)	40°	K081102	110 3/4 (2814)	1 3/32 (28)	40°
K080570	57 1/2 (1462)	1 3/32 (28)	40°	K081124	113 (2869)	1 3/32 (28)	40°
K080575	58 1/8 (1475)	1 3/32 (28)	40°	K081145	115 1/8 (2924)	1 3/32 (28)	40°
K080580	58 5/8 (1490)	1 3/32 (28)	40°	K081153	116 1/4 (2953)	1 3/32 (28)	40°
K080585	59 (1499)	1 3/32 (28)	40°	K081177	118 1/4 (3005)	1 3/32 (28)	40°
K080590	59 1/2 (1512)	1 3/32 (28)	40°	K081189	119 1/2 (3035)	1 3/32 (28)	40°
K080594	60 (1523)	1 3/32 (28)	40°	K081196	120 1/8 (3050)	1 3/32 (28)	40°
K080600	60 5/8 (1538)	1 3/32 (28)	40°	K081207	121 3/8 (3082)	1 3/32 (28)	40°
K080605	61 1/8 (1553)	1 3/32 (28)	40°	K081213	121 7/8 (3096)	1 3/32 (28)	40°
K080610	61 3/4 (1569)	1 3/32 (28)	40°	K081223	122 3/4 (3117)	1 3/32 (28)	40°
K080615	62 1/8 (1577)	1 3/32 (28)	40°	K081251	125 5/8 (3192)	1 3/32 (28)	40°
K080620	62 5/8 (1591)	1 3/32 (28)	40°	K081265	127 1/8 (3228)	1 3/32 (28)	40°
K080623	62 7/8 (1598)	1 3/32 (28)	40°	K081331	133 3/4 (3396)	1 3/32 (28)	40°
K080626	63 1/8 (1603)	1 3/32 (28)	40°	K081359	136 1/2 (3468)	1 3/32 (28)	40°
K080630	63 5/8 (1616)	1 3/32 (28)	40°	K081377	138 1/4 (3513)	1 3/32 (28)	40°
K080635	64 1/4 (1633)	1 3/32 (28)	40°	K090500	50 1/2 (1282)	1 7/32 (31)	40°
K080644	65 (1651)	1 3/32 (28)	40°	K090609	61 1/2 (1562)	1 7/32 (31)	40°
K080645	65 1/4 (1657)	1 3/32 (28)	40°	K100381	38 3/4 (983)	1 3/8 (35)	40°
K080649	65 1/2 (1665)	1 3/32 (28)	40°	K100437	44 1/4 (1124)	1 3/8 (35)	40°
K080653	65 7/8 (1674)	1 3/32 (28)	40°	K100445	45 1/8 (1148)	1 3/8 (35)	40°
K080655	66 1/4 (1683)	1 3/32 (28)	40°	K100456	46 1/8 (1173)	1 3/8 (35)	40°
K080660	66 1/2 (1691)	1 3/32 (28)	40°	K100465	47 (1195)	1 3/8 (35)	40°
K080670	67 1/2 (1716)	1 3/32 (28)	40°	K100485	48 7/8 (1241)	1 3/8 (35)	40°
K080672	67 3/4 (1722)	1 3/32 (28)	40°	K100495	50 1/8 (1274)	1 3/8 (35)	40°
K080675	68 (1728)	1 3/32 (28)	40°	K100502	50 3/4 (1288)	1 3/8 (35)	40°
K080677	68 1/4 (1734)	1 3/32 (28)	40°	K100510	51 1/2 (1309)	1 3/8 (35)	40°
K080680	68 5/8 (1742)	1 3/32 (28)	40°	K100535	54 (1373)	1 3/8 (35)	40°
K080685	69 1/8 (1756)	1 3/32 (28)	40°	K100540	54 1/2 (1385)	1 3/8 (35)	40°
K080690	69 5/8 (1767)	1 3/32 (28)	40°	K100554	56 (1423)	1 3/8 (35)	40°
K080694	70 (1777)	1 3/32 (28)	40°	K100563	56 7/8 (1444)	1 3/8 (35)	40°
K080700	70 1/2 (1789)	1 3/32 (28)	40°	K100570	57 1/2 (1462)	1 3/8 (35)	40°
K080702	70 3/4 (1798)	1 3/32 (28)	40°	K100572	57 7/8 (1469)	1 3/8 (35)	40°
K080708	71 1/4 (1811)	1 3/32 (28)	40°	K100575	58 1/8 (1475)	1 3/8 (35)	40°
K080710	71 1/2 (1816)	1 3/32 (28)	40°	K100579	58 1/2 (1487)	1 3/8 (35)	40°
K080716	72 1/8 (1831)	1 3/32 (28)	40°	K100594	60 (1523)	1 3/8 (35)	40°
K080720	72 5/8 (1845)	1 3/32 (28)	40°	K100607	61 1/4 (1557)	1 3/8 (35)	40°
K080726	73 1/4 (1859)	1 3/32 (28)	40°	K100610	61 5/8 (1564)	1 3/8 (35)	40°
K080730	73 1/2 (1867)	1 3/32 (28)	40°	K100618	62 3/8 (1585)	1 3/8 (35)	40°
K080733	73 3/4 (1874)	1 3/32 (28)	40°	K100630	63 5/8 (1616)	1 3/8 (35)	40°
K080738	74 3/8 (1889)	1 3/32 (28)	40°	K100637	64 1/4 (1633)	1 3/8 (35)	40°
K080740	74 5/8 (1896)	1 3/32 (28)	40°	K100640	64 5/8 (1642)	1 3/8 (35)	40°
K080745	75 1/8 (1907)	1 3/32 (28)	40°	K100655	66 (1678)	1 3/8 (35)	40°
K080751	75 5/8 (1921)	1 3/32 (28)	40°	K100658	66 3/8 (1687)	1 3/8 (35)	40°
K080755	76 (1931)	1 3/32 (28)	40°	K100665	67 1/8 (1704)	1 3/8 (35)	40°
K080760	76 1/2 (1942)	1 3/32 (28)	40°	K100670	67 1/2 (1716)	1 3/8 (35)	40°
K080765	77 (1957)	1 3/32 (28)	40°	K100675	68 (1728)	1 3/8 (35)	40°
K080774	77 3/4 (1976)	1 3/32 (28)	40°	K100677	68 1/4 (1734)	1 3/8 (35)	40°
K080776	78 1/8 (1985)	1 3/32 (28)	40°	K100710	71 1/2 (1816)	1 3/8 (35)	40°
K080780	78 5/8 (1996)	1 3/32 (28)	40°	K100719	72 3/8 (1840)	1 3/8 (35)	40°
K080785	79 (2007)	1 3/32 (28)	40°	K100731	73 5/8 (1871)	1 3/8 (35)	40°
K080790	79 1/2 (2019)	1 3/32 (28)	40°	K100739	74 1/2 (1893)	1 3/8 (35)	40°
K080797	80 1/8 (2037)	1 3/32 (28)	40°	K100771	77 3/4 (1976)	1 3/8 (35)	40°
K080806	81 1/8 (2061)	1 3/32 (28)	40°	K100789	79 1/2 (2019)	1 3/8 (35)	40°
K080810	81 5/8 (2073)	1 3/32 (28)	40°	K100810	81 5/8 (2073)	1 3/8 (35)	40°
K080816	82 1/8 (2086)	1 3/32 (28)	40°	K100852	85 7/8 (2182)	1 3/8 (35)	40°
K080817	82 3/8 (2091)	1 3/32 (28)	40°	K100891	89 3/4 (2278)	1 3/8 (35)	40°
K080820	82 3/4 (2101)	1 3/32 (28)	40°	K120281	28 3/4 (730)	1 21/32 (42)	40°
K080825	83 1/8 (2112)	1 3/32 (28)	40°	K120360	36 5/8 (929)	1 21/32 (42)	40°
K080830	83 3/4 (2127)	1 3/32 (28)	40°	K120390	39 3/4 (1008)	1 21/32 (42)	40°
K080839	84 3/8 (2144)	1 3/32 (28)	40°	K120400	40 3/4 (1034)	1 21/32 (42)	40°
K080842	84 3/4 (2154)	1 3/32 (28)	40°	K120410	41 1/2 (1054)	1 21/32 (42)	40°
K080855	86 1/8 (2187)	1 3/32 (28)	40°	K120525	53 1/8 (1351)	1 21/32 (42)	40°
K080859	86 3/8 (2195)	1 3/32 (28)	40°	K120559	56 1/2 (1436)	1 21/32 (42)	40°
K080872	87 3/4 (2230)	1 3/32 (28)	40°	K120594	60 (1523)	1 21/32 (42)	40°
K080893	89 7/8 (2282)	1 3/32 (28)	40°	K120606	61 1/8 (1553)	1 21/32 (42)	40°
K080897	90 3/8 (2295)	1 3/32 (28)	40°	K120610	61 3/4 (1569)	1 21/32 (42)	40°
K080903	90 7/8 (2308)	1 3/32 (28)	40°	K120702	70 3/4 (1798)	1 21/32 (42)	40°
K080910	91 5/8 (2326)	1 3/32 (28)	40°	K120720	72 5/8 (1845)	1 21/32 (42)	40°
K080915	92 1/8 (2340)	1 3/32 (28)	40°	K120738	74 3/8 (1889)	1 21/32 (42)	40°
K080922	92 3/4 (2355)	1 3/32 (28)	40°	K120815	82 (2083)	1 21/32 (42)	40°
K080926	93 1/8 (2367)	1 3/32 (28)	40°	K120842	84 3/4 (2154)	1 21/32 (42)	40°

(mm) Millimeters

* Dual Sided Belt

Micro-V® Belts Listed by Number

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
K120864	86 7/8 (2208)	1 21/32 (42)	40°	K140451	45 5/8 (1160)	1 15/16 (49)	40°
K120872	87 3/4 (2230)	1 21/32 (42)	40°	K140496	50 1/8 (1274)	1 15/16 (49)	40°
K120878	88 3/8 (2245)	1 21/32 (42)	40°	K140516	52 1/8 (1325)	1 15/16 (49)	40°
K120901	90 5/8 (2301)	1 21/32 (42)	40°	K140524	53 1/8 (1350)	1 15/16 (49)	40°
K120903	90 7/8 (2308)	1 21/32 (42)	40°	K140555	56 (1423)	1 15/16 (49)	40°
K120911	91 3/4 (2329)	1 21/32 (42)	40°	K140580	58 5/8 (1490)	1 15/16 (49)	40°
K120924	93 1/8 (2364)	1 21/32 (42)	40°	K140594	60 (1523)	1 15/16 (49)	40°
K120931	93 3/4 (2381)	1 21/32 (42)	40°	K140597	60 3/8 (1534)	1 15/16 (49)	40°
K120964	97 (2463)	1 21/32 (42)	40°	K140603	60 7/8 (1546)	1 15/16 (49)	40°
K120979	98 1/8 (2492)	1 21/32 (42)	40°	K140618	62 3/8 (1585)	1 15/16 (49)	40°
K121039	104 1/2 (2654)	1 21/32 (42)	40°	K140627	63 3/8 (1609)	1 15/16 (49)	40°
K140345	35 (890)	1 15/16 (49)	40°	K140662	66 3/4 (1696)	1 15/16 (49)	40°
K140352	35 7/8 (910)	1 15/16 (49)	40°	K140682	68 3/4 (1746)	1 15/16 (49)	40°
K140370	37 1/2 (954)	1 15/16 (49)	40°	K140700	70 1/2 (1789)	1 15/16 (49)	40°
K140429	43 1/2 (1106)	1 15/16 (49)	40°	K150759	76 3/8 (1942)	2 1/16 (53)	40°
K140433	43 7/8 (1116)	1 15/16 (49)	40°				

Micro-V® Belts

Listed by Width and Length

Showing Nominal Belt Top Widths, Outside Lengths and Angles
with Our Corresponding Belt Numbers

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
1/4" (6 mm) Top Width			9/16" (14 mm) Top Width			21/32" (17 mm) Top Width		
			- Continued			- Continued		
79 3/8 (2015).....	40°	H040790	36 3/8 (924).....	40°	K040358	36 3/4 (932).....	40°	K050360
92 3/8 (2345).....	40°	H040920	36 3/4 (932).....	40°	K040360	37 1/8 (943).....	40°	K050365
5/16" (8 mm) Top Width			37 1/8 (943).....	40°	K040365	37 3/8 (949).....	40°	K050368
92 3/8 (2345).....	40°	H050920	37 1/2 (954).....	40°	K040370	37 3/4 (957).....	40°	K050370
100 3/8 (2550).....	40°	H051000	38 (964).....	40°	K040372	38 1/4 (970).....	40°	K050375
13/32" (11 mm) Top Width			38 1/2 (977).....	40°	K040378	38 3/4 (983).....	40°	K050380
19 7/8 (505).....	40°	K030195	38 3/4 (983).....	40°	K040382	39 1/4 (996).....	40°	K050385
22 5/8 (576).....	40°	K030220	39 (990).....	40°	K040384	39 3/4 (1008).....	40°	K050390
24 1/4 (615).....	40°	K030236	39 1/8 (993).....	40°	K040385	40 1/4 (1021).....	40°	K050396
24 3/4 (629).....	40°	K030240	39 3/8 (999).....	40°	K040388	40 3/8 (1027).....	40°	K050398
25 1/4 (640).....	40°	K030245	39 3/4 (1008).....	40°	K040390	40 5/8 (1031).....	40°	K050400
25 3/4 (654).....	40°	K030250	40 1/4 (1021).....	40°	K040395	40 3/4 (1035).....	40°	K050402
27 1/8 (689).....	40°	K030265	40 3/8 (1027).....	40°	K040398	41 1/4 (1047).....	40°	K050405
27 3/8 (695).....	40°	K030267	40 5/8 (1031).....	40°	K040399	41 3/4 (1059).....	40°	K050410
28 3/4 (730).....	40°	K030280	40 3/4 (1034).....	40°	K040400	42 1/8 (1068).....	40°	K050415
29 3/4 (755).....	40°	K030290	41 1/4 (1047).....	40°	K040405	42 3/8 (1076).....	40°	K050418
30 1/8 (765).....	40°	K030295	41 3/4 (1059).....	40°	K040410	42 5/8 (1084).....	40°	K050420
30 1/2 (775).....	40°	K030299	42 1/8 (1068).....	40°	K040413	43 1/8 (1095).....	40°	K050425
30 3/4 (781).....	40°	K030300	42 3/8 (1076).....	40°	K040418	43 1/2 (1103).....	40°	K050429
31 5/8 (805).....	40°	K030310	42 5/8 (1084).....	40°	K040420	43 3/4 (1113).....	40°	K050433
32 7/8 (836).....	40°	K030323	43 1/8 (1095).....	40°	K040425	44 1/8 (1122).....	40°	K050435
33 1/2 (850).....	40°	K030328	43 3/4 (1111).....	40°	K040430	44 3/4 (1135).....	40°	K050440
34 (864).....	40°	K030334	44 3/8 (1128).....	40°	K040438	45 1/8 (1148).....	40°	K050446
34 5/8 (881).....	40°	K030340	44 3/4 (1135).....	40°	K040440	45 5/8 (1160).....	40°	K050450
35 5/8 (906).....	40°	K030350	45 1/8 (1148).....	40°	K040445	46 (1170).....	40°	K050455
37 1/8 (943).....	40°	K030365	45 5/8 (1160).....	40°	K040450	46 3/8 (1179).....	40°	K050459
39 1/8 (993).....	40°	K030384	46 5/8 (1186).....	40°	K040460	46 5/8 (1186).....	40°	K050460
39 3/4 (1008).....	40°	K030390	47 (1195).....	40°	K040465	47 3/4 (1215).....	40°	K050470
40 1/4 (1021).....	40°	K030395	47 5/8 (1211).....	40°	K040470	47 7/8 (1218).....	40°	K050474
42 1/8 (1068).....	40°	K030415	48 1/8 (1223).....	40°	K040476	48 3/8 (1228).....	40°	K050478
43 1/8 (1095).....	40°	K030425	49 1/2 (1258).....	40°	K040490	48 5/8 (1237).....	40°	K050480
44 3/4 (1135).....	40°	K030441	50 5/8 (1286).....	40°	K040500	49 1/8 (1249).....	40°	K050486
46 (1170).....	40°	K030455	51 1/8 (1300).....	40°	K040506	49 1/2 (1258).....	40°	K050490
9/16" (14 mm) Top Width			51 1/2 (1309).....	40°	K040510	50 5/8 (1286).....	40°	K050500
24 1/2 (622).....	40°	K040233	52 (1320).....	40°	K040514	51 (1297).....	40°	K050505
25 1/4 (640).....	40°	K040245	52 1/8 (1325).....	40°	K040517	51 1/8 (1300).....	40°	K050507
25 3/4 (654).....	40°	K040250	52 5/8 (1338).....	40°	K040520	51 3/4 (1315).....	40°	K050510
27 3/4 (704).....	40°	K040270	53 1/8 (1351).....	40°	K040525	52 1/4 (1327).....	40°	K050516
28 (710).....	40°	K040274	53 1/2 (1360).....	40°	K040529	52 5/8 (1338).....	40°	K050520
28 1/4 (717).....	40°	K040275	54 (1373).....	40°	K040535	52 7/8 (1343).....	40°	K050523
29 1/4 (742).....	40°	K040285	55 1/8 (1399).....	40°	K040545	53 1/2 (1359).....	40°	K050530
29 3/4 (755).....	40°	K040292	55 3/4 (1415).....	40°	K040551	53 7/8 (1367).....	40°	K050532
29 3/4 (755).....	40°	J060293	56 1/2 (1436).....	40°	K040560	54 3/8 (1380).....	40°	K050538
30 3/4 (781).....	40°	K040300	58 1/8 (1475).....	40°	K040575	55 1/4 (1404).....	40°	K050545
31 1/4 (793).....	40°	K040305	60 (1523).....	40°	K040595	55 3/4 (1415).....	40°	K050551
31 3/4 (805).....	40°	K040310	64 1/8 (1627).....	40°	K040635	57 (1448).....	40°	K050565
32 1/4 (818).....	40°	K040315	69 1/8 (1756).....	40°	K040685	57 1/2 (1462).....	40°	K050570
32 1/2 (824).....	40°	K040319	75 1/8 (1907).....	40°	K040745	59 1/4 (1504).....	40°	K050586
32 3/4 (831).....	40°	K040320	76 7/8 (1951).....	40°	K040762	61 1/2 (1563).....	40°	K050609
32 7/8 (836).....	40°	K040322	88 3/4 (2255).....	40°	K040882	63 1/8 (1603).....	40°	K050625
33 1/4 (844).....	40°	K040325	94 5/8 (2403).....	40°	K040940	63 5/8 (1616).....	40°	K050630
33 3/8 (849).....	40°	K040329	21/32" (17 mm) Top Width			64 1/8 (1627).....	40°	K050635
33 1/2 (850).....	40°	J060328	20 3/4 (527).....	40°	K050200	64 5/8 (1642).....	40°	K050640
33 3/4 (856).....	40°	K040330	28 1/4 (717).....	40°	K050275	65 (1651).....	40°	K050644
33 3/4 (858).....	40°	K040332	28 3/4 (730).....	40°	K050280	65 1/4 (1657).....	40°	K050647
34 (864).....	40°	K040335	29 3/4 (755).....	40°	K050290	65 7/8 (1675).....	40°	K050650
34 3/8 (874).....	40°	K040338	32 1/4 (818).....	40°	K050316	66 3/8 (1687).....	40°	K050658
34 5/8 (881).....	40°	K040340	32 1/2 (824).....	40°	K050317	66 3/4 (1696).....	40°	K050660
34 7/8 (885).....	40°	K040343	33 (837).....	40°	K050323	67 1/8 (1704).....	40°	K050665
35 (889).....	40°	K040345	33 3/4 (856).....	40°	K050330	69 3/4 (1772).....	40°	K050690
35 3/8 (897).....	40°	K040347	34 (864).....	40°	K050335	71 1/8 (1807).....	40°	K050705
35 5/8 (906).....	40°	K040350	34 3/8 (872).....	40°	K050336	72 1/8 (1831).....	40°	K050715
35 7/8 (912).....	40°	K040353	34 5/8 (881).....	40°	K050340	72 5/8 (1845).....	40°	K050720
36 1/8 (918).....	40°	K040355	35 (875).....	40°	K050344	75 3/8 (1914).....	40°	K050750
			35 1/4 (894).....	40°	K050345	76 (1932).....	40°	K050755
			35 5/8 (906).....	40°	K050350	76 1/4 (1937).....	40°	K050757
			36 1/8 (918).....	40°	K050355	78 3/8 (1989).....	40°	K050778
						82 1/2 (2096).....	40°	K050817

(mm) Millimeters

* Dual Sided Belt

Micro-V® Belts Listed by Width and Length

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
21/32" (17 mm) Top Width - Continued			13/16" (20 mm) Top Width - Continued			13/16" (20 mm) Top Width - Continued		
83 1/8 (2112)	40°	K050825	60 7/8 (1547)	40°	K060604	90 5/8 (2301)	40°	K060900
84 (2134)	40°	K050835	61 1/8 (1553)	40°	K060605	90 7/8 (2308)	40°	K060905
84 1/8 (2138)	40°	K050836	61 1/2 (1563)	40°	K060609	91 1/4 (2318)	40°	K060908
85 1/8 (2164)	40°	K050845	61 3/4 (1569)	40°	K060612	91 5/8 (2329)	40°	K060910
86 1/8 (2187)	40°	K050855	62 1/8 (1577)	40°	K060615	92 1/8 (2340)	40°	K060915
86 1/8 (2187)	40°	K050855	62 5/8 (1591)	40°	K060620	92 3/8 (2347)	40°	K060919
89 1/8 (2265)	40°	K050887	62 7/8 (1598)	40°	K060623	92 7/8 (2360)	40°	K060923
13/16" (20 mm) Top Width			63 1/8 (1603)	40°	K060625	93 1/8 (2364)	40°	K060926
29 1/2 (748)	40°	K060288	63 5/8 (1616)	40°	K060630	93 5/8 (2377)	40°	K060930
30 1/8 (765)	40°	K060295	64 1/8 (1627)	40°	K060635	94 (2387)	40°	K060935
31 1/4 (793)	40°	K060305	64 3/8 (1634)	40°	K060637	94 1/2 (2400)	40°	K060938
33 1/4 (844)	40°	K060325	64 5/8 (1642)	40°	K060640	94 3/4 (2407)	40°	K060942
33 3/4 (856)	40°	K060331	64 3/4 (1646)	40°	K060642	95 1/8 (2415)	40°	K060945
34 3/8 (873)	40°	K060338	65 (1651)	40°	K060645	95 1/4 (2419)	40°	K060947
34 3/4 (881)	40°	K060340	65 1/2 (1665)	40°	K060650	95 5/8 (2428)	40°	K060950
35 1/4 (894)	40°	K060345	65 7/8 (1674)	40°	K060653	96 1/8 (2440)	40°	K060956
36 1/8 (918)	40°	K060355	66 3/8 (1687)	40°	K060658	96 5/8 (2452)	40°	K060960
37 1/8 (943)	40°	K060365	66 3/4 (1696)	40°	K060660	96 7/8 (2460)	40°	K060962
37 3/4 (957)	40°	K060370	66 7/8 (1699)	40°	K060663	97 1/8 (2468)	40°	K060966
38 (964)	40°	K060374	67 1/4 (1708)	40°	K060667	97 5/8 (2479)	40°	K060970
38 3/4 (983)	40°	K060380	67 1/2 (1716)	40°	K060670	98 1/8 (2492)	40°	K060975
39 1/8 (993)	40°	K060385	67 3/4 (1722)	40°	K060672	98 5/8 (2505)	40°	K060980
39 3/8 (999)	40°	K060388	68 (1728)	40°	K060675	99 (2513)	40°	K060984
39 3/4 (1008)	40°	K060390	68 5/8 (1742)	40°	K060680	99 1/2 (2526)	40°	K060988
40 3/4 (1034)	40°	K060400	68 7/8 (1750)	40°	K060682	99 5/8 (2531)	40°	K060990
41 (1043)	40°	K060405	69 1/8 (1756)	40°	K060685	99 7/8 (2537)	40°	K060994
41 3/8 (1050)	40°	K060407	69 5/8 (1767)	40°	K060690	100 1/4 (2546)	40°	K060997
41 1/2 (1054)	40°	K060408	70 (1777)	40°	K060695	100 5/8 (2555)	40°	K061000
41 3/4 (1059)	40°	K060410	70 1/4 (1783)	40°	K060696	101 1/8 (2568)	40°	K061005
42 1/8 (1069)	40°	K060415	70 7/8 (1799)	40°	K060703	101 5/8 (2581)	40°	K061010
42 1/2 (1081)	40°	K060420	71 1/8 (1807)	40°	K060705	102 1/8 (2593)	40°	K061015
42 7/8 (1089)	40°	K060423	71 1/2 (1816)	40°	K060710	102 5/8 (2605)	40°	K061020
43 1/8 (1095)	40°	K060425	72 (1830)	40°	K060716	103 (2615)	40°	K061025
43 1/2 (1103)	40°	K060427	72 5/8 (1845)	40°	K060721	103 5/8 (2633)	40°	K061031
43 3/4 (1111)	40°	K060431	72 3/4 (1848)	40°	K060722	103 7/8 (2639)	40°	K061033
43 7/8 (1116)	40°	K060434	73 1/4 (1859)	40°	K060725	104 1/4 (2649)	40°	K061037
44 1/8 (1122)	40°	K060435	73 1/2 (1867)	40°	K060730	105 (2666)	40°	K061045
44 1/2 (1129)	40°	K060439	73 7/8 (1876)	40°	K060733	106 3/8 (2701)	40°	K061058
44 3/4 (1135)	40°	K060441	74 1/8 (1881)	40°	K060735	107 1/8 (2722)	40°	K061066
45 1/8 (1148)	40°	K060445	74 1/2 (1893)	40°	K060739	107 7/8 (2741)	40°	K061073
45 5/8 (1160)	40°	K060450	75 (1904)	40°	K060744	108 1/8 (2746)	40°	K061075
46 (1170)	40°	K060455	75 3/8 (1914)	40°	K060747	108 3/4 (2761)	40°	K061080
46 3/8 (1179)	40°	K060458	75 5/8 (1921)	40°	K060750	109 3/8 (2780)	40°	K061098
46 5/8 (1186)	40°	K060461	76 (1932)	40°	K060755	111 1/8 (2824)	40°	K061105
47 (1195)	40°	K060465	76 1/2 (1942)	40°	K060760	111 5/8 (2835)	40°	K061110
47 3/8 (1204)	40°	K060468	76 7/8 (1951)	40°	K060763	111 7/8 (2841)	40°	K061114
47 5/8 (1211)	40°	K060470	77 3/8 (1967)	40°	K060770	111 7/8 (2841)	40°	K061115
47 7/8 (1216)	40°	K060473	77 7/8 (1977)	40°	K060772	112 1/2 (2859)	40°	K061120
48 1/4 (1227)	40°	K060478	78 (1982)	40°	K060775	112 7/8 (2869)	40°	K061123
48 5/8 (1237)	40°	K060480	78 5/8 (1996)	40°	K060780	113 5/8 (2886)	40°	K061130
48 7/8 (1241)	40°	K060483	79 (2007)	40°	K060785	114 1/2 (2910)	40°	K061140
49 1/8 (1248)	40°	K060486	79 1/2 (2018)	40°	K060790	115 1/4 (2927)	40°	K061145
49 1/2 (1258)	40°	K060490	80 1/8 (2034)	40°	K060795	118 1/4 (3005)	40°	K061177
50 1/8 (1274)	40°	K060495	80 3/8 (2040)	40°	K060798	119 1/4 (3030)	40°	K061187
50 3/4 (1288)	40°	K060500	80 3/4 (2051)	40°	K060802	120 1/8 (3051)	40°	K061195
51 (1297)	40°	K060505	81 1/8 (2061)	40°	K060806	120 7/8 (3069)	40°	K061203
51 1/8 (1300)	40°	K060507	81 5/8 (2073)	40°	K060810	136 5/8 (3470)	40°	K061306
51 1/2 (1309)	40°	K060509	82 1/8 (2085)	40°	K060815	27/32" (21 mm) Top Width		
51 3/4 (1315)	40°	K060512	82 1/2 (2096)	40°	K060820	47 5/8 (1210)	40°	*DK060472
52 1/8 (1325)	40°	K060516	83 1/8 (2112)	40°	K060825	52 9/16 (1335)	40°	*DK060519
52 3/4 (1339)	40°	K060520	83 1/4 (2116)	40°	K060827	72 1/4 (1835)	40°	*DK060718
52 7/8 (1342)	40°	K060523	83 3/4 (2127)	40°	K060832	72 3/4 (1848)	40°	*DK060725
53 3/8 (1355)	40°	K060525	84 1/4 (2140)	40°	K060837	73 11/32 (1863)	40°	*DK060729
53 1/2 (1359)	40°	K060529	84 1/2 (2147)	40°	K060840	15/16" (24 mm) Top Width		
53 7/8 (1367)	40°	K060532	85 1/4 (2165)	40°	K060845	32 1/2 (824)	40°	K070319
54 1/4 (1379)	40°	K060535	85 1/2 (2171)	40°	K060849	36 7/8 (936)	40°	K070362
54 1/2 (1385)	40°	K060539	85 7/8 (2182)	40°	K060854	37 3/4 (957)	40°	K070370
55 1/4 (1404)	40°	K060547	86 3/8 (2193)	40°	K060858	39 3/4 (1008)	40°	K070390
55 3/4 (1415)	40°	K060551	86 5/8 (2201)	40°	K060860	43 1/8 (1095)	40°	K070425
56 (1423)	40°	K060555	86 7/8 (2206)	40°	K060863	51 1/8 (1300)	40°	K070505
56 1/4 (1429)	40°	K060557	86 7/8 (2208)	40°	K060864	55 7/8 (1418)	40°	K070553
56 1/2 (1436)	40°	K060559	87 1/4 (2216)	40°	K060866	62 3/4 (1594)	40°	K070622
56 5/8 (1439)	40°	K060560	87 3/8 (2219)	40°	K060868	63 3/8 (1609)	40°	K070628
56 7/8 (1445)	40°	K060563	87 5/8 (2225)	40°	K060870	63 5/8 (1616)	40°	K070630
57 1/2 (1462)	40°	K060569	87 7/8 (2233)	40°	K060874	64 5/8 (1642)	40°	K070640
57 7/8 (1471)	40°	K060573	88 1/8 (2238)	40°	K060875	65 7/8 (1675)	40°	K070653
58 (1473)	40°	K060575	88 1/8 (2239)	40°	K060876	67 3/4 (1722)	40°	K070673
58 3/8 (1483)	40°	K060578	88 3/8 (2245)	40°	K060878	68 1/4 (1734)	40°	K070677
59 1/4 (1504)	40°	K060586	88 7/8 (2257)	40°	K060882	68 5/8 (1743)	40°	K070680
60 (1523)	40°	K060594	88 7/8 (2257)	40°	K060883			
60 3/8 (1534)	40°	K060598	89 1/2 (2273)	40°	K060888			
60 3/4 (1542)	40°	K060602	89 3/4 (2278)	40°	K060891			
			90 1/8 (2289)	40°	K060895			

Micro-V® Belts Listed by Width and Length

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
15/16" (24 mm) Top Width - Continued			1 3/32" (28 mm) Top Width - Continued			1 3/32" (28 mm) Top Width - Continued		
68 7/8 (1750).....	40°	K070683	54 1/4 (1379).....	40°	K080537	99 1/8 (2519).....	40°	K080986
69 1/8 (1756).....	40°	K070685	55 1/8 (1399).....	40°	K080545	99 5/8 (2531).....	40°	K080991
70 (1779).....	40°	K070694	55 3/4 (1415).....	40°	K080550	100 5/8 (2555).....	40°	K081000
70 3/4 (1796).....	40°	K070701	56 1/4 (1429).....	40°	K080558	101 1/8 (2568).....	40°	K081005
71 1/8 (1807).....	40°	K070705	56 5/8 (1439).....	40°	K080560	102 5/8 (2605).....	40°	K081020
71 1/2 (1816).....	40°	K070709	57 (1448).....	40°	K080565	102 7/8 (2613).....	40°	K081023
73 3/4 (1874).....	40°	K070733	57 1/8 (1452).....	40°	K080566	104 (2642).....	40°	K081035
74 1/8 (1883).....	40°	K070735	57 1/2 (1462).....	40°	K080570	108 (2745).....	40°	K081074
76 7/8 (1951).....	40°	K070763	58 1/8 (1475).....	40°	K080575	108 1/2 (2756).....	40°	K081079
78 (1982).....	40°	K070776	58 5/8 (1490).....	40°	K080580	109 3/8 (27).....	40°	K081088
79 1/8 (2011).....	40°	K070786	59 (1499).....	40°	K080585	109 3/4 (2788).....	40°	K081092
83 1/8 (2112).....	40°	K070825	59 1/2 (1512).....	40°	K080590	110 3/4 (2814).....	40°	K081102
84 (2133).....	40°	K070834	60 (1523).....	40°	K080594	113 (2869).....	40°	K081124
84 (2134).....	40°	K070835	60 5/8 (1538).....	40°	K080600	115 1/8 (2924).....	40°	K081145
86 1/8 (2187).....	40°	K070855	61 1/8 (1553).....	40°	K080605	116 1/4 (2953).....	40°	K081153
87 7/8 (2232).....	40°	K070873	61 3/4 (1569).....	40°	K080610	118 1/4 (3005).....	40°	K081177
88 1/2 (2249).....	40°	K070880	62 1/8 (1577).....	40°	K080615	119 1/2 (3035).....	40°	K081189
88 3/4 (2255).....	40°	K070882	62 5/8 (1591).....	40°	K080620	120 1/8 (3050).....	40°	K081196
89 1/8 (2263).....	40°	K070885	62 7/8 (1598).....	40°	K080623	121 3/8 (3082).....	40°	K081207
89 1/8 (2265).....	40°	K070886	63 1/8 (1603).....	40°	K080626	121 7/8 (3096).....	40°	K081213
89 3/4 (2278).....	40°	K070890	63 5/8 (1616).....	40°	K080630	122 3/4 (3117).....	40°	K081223
90 1/8 (2289).....	40°	K070896	64 1/4 (1633).....	40°	K080635	125 5/8 (3192).....	40°	K081251
90 5/8 (2301).....	40°	K070901	65 (1651).....	40°	K080644	127 1/8 (3228).....	40°	K081265
90 7/8 (2308).....	40°	K070903	65 1/4 (1657).....	40°	K080645	133 3/4 (3396).....	40°	K081331
91 1/8 (2314).....	40°	K070905	65 1/2 (1665).....	40°	K080649	136 1/2 (3468).....	40°	K081359
92 1/4 (2343).....	40°	K070916	65 7/8 (1674).....	40°	K080653	138 1/4 (3513).....	40°	K081377
92 3/4 (2357).....	40°	K070922	66 1/4 (1683).....	40°	K080655	1 7/32" (31 mm) Top Width		
93 (2362).....	40°	K070924	66 1/2 (1691).....	40°	K080660	50 1/2 (1282).....	40°	K090500
93 5/8 (2378).....	40°	K070931	67 1/2 (1716).....	40°	K080670	61 1/2 (1562).....	40°	K090609
95 3/4 (2431).....	40°	K070951	67 3/4 (1722).....	40°	K080672	1 3/8" (35 mm) Top Width		
97 3/4 (2484).....	40°	K070975	68 (1728).....	40°	K080675	38 3/4 (983).....	40°	K100381
98 1/8 (2492).....	40°	K070976	68 1/4 (1734).....	40°	K080677	44 1/4 (1124).....	40°	K100437
101 1/8 (2568).....	40°	K071005	68 5/8 (1742).....	40°	K080680	45 1/8 (1148).....	40°	K100445
101 3/8 (2576).....	40°	K071009	69 1/8 (1756).....	40°	K080685	46 1/8 (1173).....	40°	K100456
101 7/8 (2586).....	40°	K071013	69 5/8 (1767).....	40°	K080690	47 (1195).....	40°	K100465
103 5/8 (2633).....	40°	K071031	70 (1777).....	40°	K080694	48 7/8 (1241).....	40°	K100485
104 1/4 (2649).....	40°	K071037	70 1/2 (1789).....	40°	K080700	50 1/8 (1274).....	40°	K100495
104 5/8 (2656).....	40°	K071040	70 3/4 (1798).....	40°	K080702	50 3/4 (1288).....	40°	K100502
105 1/8 (2671).....	40°	K071045	71 1/4 (1811).....	40°	K080708	51 1/2 (1309).....	40°	K100510
106 1/4 (2699).....	40°	K071056	71 1/2 (1816).....	40°	K080710	54 (1373).....	40°	K100535
113 5/8 (2886).....	40°	K071130	72 1/8 (1831).....	40°	K080716	54 1/2 (1385).....	40°	K100540
114 (2897).....	40°	K071134	72 5/8 (1845).....	40°	K080720	56 (1423).....	40°	K100554
114 5/8 (2912).....	40°	K071141	73 1/4 (1859).....	40°	K080726	56 7/8 (1444).....	40°	K100563
115 5/8 (2936).....	40°	K071150	73 1/2 (1867).....	40°	K080730	57 1/2 (1462).....	40°	K100570
116 1/4 (2953).....	40°	K071157	73 3/4 (1874).....	40°	K080733	57 7/8 (1469).....	40°	K100572
119 7/8 (3046).....	40°	K071194	74 3/8 (1889).....	40°	K080738	58 1/8 (1475).....	40°	K100575
125 3/8 (3183).....	40°	K071247	74 5/8 (1896).....	40°	K080740	58 1/2 (1487).....	40°	K100579
1" (25 mm) Top Width			75 1/8 (1907).....	40°	K080745	60 (1523).....	40°	K100594
54 1/16 (1373).....	40°	*DK070536	75 5/8 (1921).....	40°	K080751	61 1/4 (1557).....	40°	K100607
55 17/32 (1410).....	40°	*DK070551	76 (1931).....	40°	K080755	61 5/8 (1564).....	40°	K100610
1 3/32" (28 mm) Top Width			76 1/2 (1942).....	40°	K080760	62 3/8 (1585).....	40°	K100618
30 3/4 (781).....	40°	K080300	77 (1957).....	40°	K080765	63 5/8 (1616).....	40°	K100630
33 3/4 (856).....	40°	K080330	77 3/4 (1976).....	40°	K080774	64 1/4 (1633).....	40°	K100637
36 3/4 (932).....	40°	K080360	78 1/8 (1985).....	40°	K080776	64 5/8 (1642).....	40°	K100640
37 1/8 (943).....	40°	K080365	78 5/8 (1996).....	40°	K080780	66 (1678).....	40°	K100655
37 3/4 (957).....	40°	K080370	79 (2007).....	40°	K080785	66 3/8 (1687).....	40°	K100658
38 1/8 (968).....	40°	K080375	79 1/2 (2019).....	40°	K080790	67 1/8 (1704).....	40°	K100665
38 3/4 (983).....	40°	K080382	80 1/8 (2037).....	40°	K080797	67 1/2 (1716).....	40°	K100670
39 (990).....	40°	K080384	81 1/8 (2061).....	40°	K080806	68 (1728).....	40°	K100675
39 3/4 (1008).....	40°	K080390	81 5/8 (2073).....	40°	K080810	68 1/4 (1734).....	40°	K100677
39 7/8 (1014).....	40°	K080392	82 1/8 (2086).....	40°	K080816	71 1/2 (1816).....	40°	K100710
40 3/4 (1034).....	40°	K080400	82 3/8 (2091).....	40°	K080817	72 3/8 (1840).....	40°	K100719
41 3/8 (1051).....	40°	K080408	82 3/4 (2101).....	40°	K080820	73 5/8 (1871).....	40°	K100731
42 1/8 (1069).....	40°	K080415	83 1/8 (2112).....	40°	K080825	74 1/2 (1893).....	40°	K100739
43 1/2 (1103).....	40°	K080427	83 3/4 (2127).....	40°	K080830	77 3/4 (1976).....	40°	K100771
44 1/8 (1122).....	40°	K080435	84 3/8 (2144).....	40°	K080839	79 1/2 (2019).....	40°	K100789
45 5/8 (1160).....	40°	K080450	84 3/4 (2154).....	40°	K080842	81 5/8 (2073).....	40°	K100810
46 (1170).....	40°	K080455	86 1/8 (2187).....	40°	K080855	85 7/8 (2182).....	40°	K100852
46 3/8 (1179).....	40°	K080458	86 3/8 (2195).....	40°	K080859	89 3/4 (2278).....	40°	K100891
47 (1195).....	40°	K080465	87 3/4 (2230).....	40°	K080872	1 21/32" (42 mm) Top Width		
47 3/4 (1211).....	40°	K080471	89 7/8 (2282).....	40°	K080893	28 3/4 (730).....	40°	K120281
49 1/8 (1249).....	40°	K080485	90 3/8 (2295).....	40°	K080897	36 5/8 (929).....	40°	K120360
49 5/8 (1260).....	40°	K080491	90 7/8 (2308).....	40°	K080903	39 3/4 (1008).....	40°	K120390
50 1/8 (1274).....	40°	K080496	91 5/8 (2326).....	40°	K080910	40 3/4 (1034).....	40°	K120400
51 (1297).....	40°	K080505	92 1/8 (2340).....	40°	K080915	41 1/2 (1054).....	40°	K120410
51 1/2 (1309).....	40°	K080510	92 3/4 (2355).....	40°	K080922	53 1/8 (1351).....	40°	K120525
52 (1320).....	40°	K080514	93 1/8 (2367).....	40°	K080926	56 1/2 (1436).....	40°	K120559
53 1/8 (1351).....	40°	K080525	93 7/8 (2384).....	40°	K080934			
53 1/2 (1359).....	40°	K080530	94 1/2 (2400).....	40°	K080939			
			95 (2412).....	40°	K080944			
			95 3/4 (2432).....	40°	K080952			
			97 1/2 (2475).....	40°	K080968			
			98 5/8 (2505).....	40°	K080981			

(mm) Millimeters

* Dual Sided Belt

Micro-V® Belts Listed by Width and Length


Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
1 21/32" (42 mm) Top Width - Continued			1 21/32" (42 mm) Top Width - Continued			1 15/16" (49 mm) Top Width - Continued		
60 (1523).....	40°	K120594	97 (2463).....	40°	K120964	58 5/8 (1490).....	40°	K140580
61 1/8 (1553).....	40°	K120606	98 1/8 (2492).....	40°	K120979	60 (1523).....	40°	K140594
61 3/4 (1569).....	40°	K120610	104 1/2 (2654).....	40°	K121039	60 3/8 (1534).....	40°	K140597
70 3/4 (1798).....	40°	K120702	1 15/16" (49 mm) Top Width			60 7/8 (1546).....	40°	K140603
72 5/8 (1845).....	40°	K120720	35 (890).....	40°	K140345	62 3/8 (1585).....	40°	K140618
74 3/8 (1889).....	40°	K120738	35 7/8 (910).....	40°	K140352	63 3/8 (1609).....	40°	K140627
82 (2083).....	40°	K120815	37 1/2 (954).....	40°	K140370	66 3/4 (1696).....	40°	K140662
84 3/4 (2154).....	40°	K120842	43 1/2 (1106).....	40°	K140429	68 3/4 (1746).....	40°	K140682
86 7/8 (2208).....	40°	K120864	43 7/8 (1116).....	40°	K140433	70 1/2 (1789).....	40°	K140700
87 3/4 (2230).....	40°	K120872	45 5/8 (1160).....	40°	K140451	2 1/16" (53 mm) Top Width		
88 3/8 (2245).....	40°	K120878	50 1/8 (1274).....	40°	K140496	76 3/8 (1942).....	40°	K150759
90 5/8 (2301).....	40°	K120901	52 1/8 (1325).....	40°	K140516			
90 7/8 (2308).....	40°	K120903	53 1/8 (1350).....	40°	K140524			
91 3/4 (2329).....	40°	K120911	56 (1423).....	40°	K140555			
93 1/8 (2364).....	40°	K120924						
93 3/4 (2381).....	40°	K120931						

XL® Belts Listed by Number


Showing Our Belt Numbers with Corresponding Nominal Outside Lengths, Top Widths and Angles

IMPORTANT: Lengths shown (O.C. is Outside Circumference) are obtained by measuring around the outside of the belt. These lengths will not agree exactly with the size significant belt numbering system which is based on the effective length of the belt. Effective length ("engineered" length) cannot be measured in the field because special tools are required.

Automotive Top Widths are the standard sizes defined by the automotive belt industry (SAE J636). Due to manufacturing processes that create "Vertical Flats", the top width of XL and Truck/Bus series V-Belts will not agree with the printed top width dimensions. Top width on this page and on the belt sleeve refers to the pulley groove width and not the actual top width of these belts. A picture of a V-Belt with "Vertical Flats" is shown below. Actual top width of like belt sizes will also vary slightly depending on the manufacturer and belt style.



Competitive V-Belt



Our V-Belts with
"Vertical Flats"

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
7208.....	▼21 1/4 (540)	13/32 (9.5/10)	36°	7363.....	36 3/4 (935)	1/4 (6)	38°
7215.....	▼22 1/8 (560)	3/8 (9.5/10)	36°	7365.....	▼37 1/8 (945)	3/8 (9.5/10)	36°
7228.....	23 (585)	5/16 (8)	36°	7369.....	37 1/4 (945)	5/16 (8)	38°
7234.....	23 3/4 (605)	5/16 (8)	38°	7370.....	▼37 5/8 (955)	3/8 (9.5/10)	36°
7240.....	▼24 5/8 (625)	3/8 (9.5/10)	36°	7374.....	37 3/4 (960)	5/16 (8)	38°
7250.....	▼25 5/8 (650)	3/8 (9.5/10)	36°	7375.....	▼38 1/8 (970)	3/8 (9.5/10)	36°
7255.....	▼26 1/8 (665)	3/8 (9.5/10)	36°	7379.....	38 1/4 (970)	5/16 (8)	38°
7260.....	▼26 5/8 (675)	3/8 (9.5/10)	36°	7380.....	▼38 5/8 (980)	3/8 (9.5/10)	36°
7261.....	26 1/4 (665)	1/4 (6)	36°	7381.....	38 1/4 (970)	1/4 (6)	38°
7265.....	▼27 1/8 (690)	3/8 (9.5/10)	36°	7384.....	38 3/4 (985)	5/16 (8)	38°
7270.....	▼27 5/8 (700)	3/8 (9.5/10)	36°	7385.....	▼39 1/8 (995)	3/8 (9.5/10)	36°
7274.....	27 1/4 (690)	5/16 (8)	38°	7388.....	39 1/4 (995)	1/4 (6)	38°
7279.....	28 1/4 (720)	1/4 (6)	36°	7389.....	39 1/4 (995)	5/16 (8)	38°
7280.....	▼28 5/8 (725)	3/8 (9.5/10)	36°	7390.....	▼39 5/8 (1005)	3/8 (9.5/10)	36°
7290.....	▼29 5/8 (750)	3/8 (9.5/10)	36°	7395.....	▼40 1/8 (1020)	3/8 (9.5/10)	36°
7292.....	▼29 7/8 (760)	3/8 (9.5/10)	36°	7400.....	▼40 5/8 (1030)	3/8 (9.5/10)	36°
7295.....	▼30 1/8 (765)	3/8 (9.5/10)	36°	7404.....	40 3/4 (1035)	5/16 (8)	38°
7298.....	30 1/4 (770)	1/4 (6)	38°	7405.....	▼41 1/8 (1045)	3/8 (9.5/10)	36°
7300.....	▼30 5/8 (780)	3/8 (9.5/10)	36°	7409.....	41 1/4 (1050)	1/4 (6)	38°
7304.....	30 3/4 (780)	5/16 (8)	36°	7410.....	▼41 5/8 (1055)	3/8 (9.5/10)	36°
7305.....	▼31 1/4 (795)	13/32 (9.5/10)	36°	7417.....	▼42 1/8 (1070)	3/8 (9.5/10)	36°
7309.....	31 1/4 (795)	1/4 (6)	38°	7419.....	42 1/4 (1075)	5/16 (8)	38°
7312.....	▼31 5/8 (805)	3/8 (9.5/10)	36°	7420.....	▼42 5/8 (1080)	3/8 (9.5/10)	36°
7315.....	▼32 1/8 (815)	3/8 (9.5/10)	36°	7425.....	▼43 1/8 (1095)	3/8 (9.5/10)	36°
7318.....	32 1/4 (820)	1/4 (6)	38°	7430.....	▼43 5/8 (1110)	3/8 (9.5/10)	36°
7320.....	▼32 5/8 (830)	3/8 (9.5/10)	36°	7435.....	▼44 1/8 (1120)	3/8 (9.5/10)	36°
7324.....	32 3/4 (830)	5/16 (8)	38°	7440.....	▼44 5/8 (1135)	3/8 (9.5/10)	36°
7325.....	▼33 1/8 (840)	3/8 (9.5/10)	36°	7444.....	44 3/4 (1135)	5/16 (8)	38°
7328.....	▼33 3/8 (850)	3/8 (9.5/10)	36°	7445.....	▼45 1/8 (1145)	3/8 (9.5/10)	36°
7329.....	33 1/4 (845)	1/4 (6)	38°	7448.....	▼45 3/8 (1155)	13/32 (9.5/10)	36°
7330.....	▼33 5/8 (855)	3/8 (9.5/10)	36°	7449.....	45 1/4 (1150)	5/16 (8)	38°
7333.....	34 1/4 (870)	1/4 (6)	38°	7450.....	▼45 5/8 (1160)	3/8 (9.5/10)	36°
7334.....	33 3/4 (855)	5/16 (8)	38°	7453.....	▼45 7/8 (1165)	3/8 (9.5/10)	36°
7335.....	▼34 1/8 (865)	3/8 (9.5/10)	36°	7455.....	▼46 1/8 (1170)	3/8 (9.5/10)	36°
7340.....	▼34 5/8 (880)	3/8 (9.5/10)	36°	7459.....	46 1/4 (1175)	5/16 (8)	38°
7343.....	34 1/4 (870)	5/16 (8)	38°	7460.....	▼46 5/8 (1185)	3/8 (9.5/10)	36°
7345.....	▼35 1/8 (890)	3/8 (9.5/10)	36°	7465.....	▼47 1/8 (1195)	3/8 (9.5/10)	36°
7348.....	35 1/4 (895)	1/4 (6)	38°	7470.....	▼47 5/8 (1210)	3/8 (9.5/10)	36°
7350.....	▼35 5/8 (905)	3/8 (9.5/10)	36°	7473.....	▼47 7/8 (1215)	3/8 (9.5/10)	36°
7355.....	▼36 1/4 (920)	3/8 (9.5/10)	36°	7475.....	▼48 1/8 (1220)	3/8 (9.5/10)	36°
7359.....	36 1/4 (920)	1/4 (6)	38°	7480.....	▼48 5/8 (1235)	3/8 (9.5/10)	36°
7360.....	▼36 5/8 (930)	3/8 (9.5/10)	36°	7483.....	▼48 7/8 (1240)	3/8 (9.5/10)	36°
7362.....	36 1/2 (925)	5/16 (8)	38°	7485.....	▼49 1/8 (1250)	3/8 (9.5/10)	36°

▼ Indicates Notched Belt.

(mm) Millimeters

XL® Belts Listed by Number

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
7490.....	▼49 5/8 (1260)	3/8 (9.5/10)	36°	9390.....	▼39 3/8 (1000)	1/2 (12.5/13)	36°
7495.....	▼50 1/8 (1275)	3/8 (9.5/10)	36°	9395.....	▼39 7/8 (1015)	1/2 (12.5/13)	36°
7496.....	49 5/8 (1260)	5/16 (8)	38°	9400.....	▼40 3/8 (1025)	1/2 (12.5/13)	36°
7500.....	▼50 5/8 (1285)	3/8 (9.5/10)	36°	9403.....	▼40 5/8 (1030)	1/2 (12.5/13)	36°
7508.....	▼51 1/8 (1300)	3/8 (9.5/10)	36°	9405.....	▼40 7/8 (1040)	1/2 (12.5/13)	36°
7512.....	▼51 5/8 (1310)	3/8 (9.5/10)	36°	9412.....	▼41 3/8 (1050)	1/2 (12.5/13)	36°
7516.....	▼52 1/8 (1325)	3/8 (9.5/10)	36°	9415.....	▼41 7/8 (1065)	1/2 (12.5/13)	36°
7520.....	▼52 5/8 (1335)	3/8 (9.5/10)	36°	9420.....	▼42 3/8 (1075)	1/2 (12.5/13)	36°
7525.....	▼53 1/8 (1350)	3/8 (9.5/10)	36°	9425.....	▼42 7/8 (1090)	1/2 (12.5/13)	36°
7530.....	▼53 5/8 (1360)	3/8 (9.5/10)	36°	9430.....	▼43 3/8 (1100)	1/2 (12.5/13)	36°
7535.....	▼54 1/8 (1375)	3/8 (9.5/10)	36°	9435.....	▼43 7/8 (1115)	1/2 (12.5/13)	36°
7541.....	▼54 5/8 (1385)	3/8 (9.5/10)	36°	9440.....	▼44 3/8 (1125)	1/2 (12.5/13)	36°
7545.....	▼55 1/8 (1400)	3/8 (9.5/10)	36°	9447.....	▼44 7/8 (1140)	1/2 (12.5/13)	36°
7550.....	▼55 5/8 (1415)	3/8 (9.5/10)	36°	9451.....	▼45 3/8 (1155)	1/2 (12.5/13)	36°
7555.....	▼56 1/8 (1425)	3/8 (9.5/10)	36°	9455.....	▼45 7/8 (1165)	1/2 (12.5/13)	36°
7560.....	▼56 5/8 (1440)	3/8 (9.5/10)	36°	9463.....	▼46 3/8 (1180)	1/2 (12.5/13)	36°
7565.....	▼57 1/8 (1450)	3/8 (9.5/10)	36°	9465.....	▼46 7/8 (1190)	1/2 (12.5/13)	36°
7570.....	▼57 5/8 (1465)	3/8 (9.5/10)	36°	9470.....	▼47 3/8 (1205)	1/2 (12.5/13)	36°
7575.....	▼58 1/8 (1475)	3/8 (9.5/10)	36°	9476.....	▼47 7/8 (1215)	1/2 (12.5/13)	36°
7580.....	▼58 5/8 (1490)	3/8 (9.5/10)	36°	9480.....	▼48 3/8 (1230)	1/2 (12.5/13)	36°
7585.....	▼59 1/8 (1500)	3/8 (9.5/10)	36°	9485.....	▼48 7/8 (1240)	1/2 (12.5/13)	36°
7590.....	▼59 5/8 (1515)	3/8 (9.5/10)	36°	9490.....	▼49 3/8 (1255)	1/2 (12.5/13)	36°
7597.....	▼60 1/8 (1525)	3/8 (9.5/10)	36°	9495.....	▼49 5/8 (1260)	1/2 (12.5/13)	36°
7603.....	▼60 5/8 (1540)	3/8 (9.5/10)	36°	9500.....	▼50 3/8 (1280)	1/2 (12.5/13)	36°
7612.....	▼61 5/8 (1565)	3/8 (9.5/10)	36°	9505.....	▼50 7/8 (1290)	1/2 (12.5/13)	36°
7619.....	▼62 5/8 (1590)	3/8 (9.5/10)	36°	9510.....	▼51 3/8 (1305)	1/2 (12.5/13)	36°
7625.....	▼63 1/8 (1605)	3/8 (9.5/10)	36°	9520.....	▼52 3/8 (1330)	1/2 (12.5/13)	36°
7630.....	▼63 5/8 (1615)	3/8 (9.5/10)	36°	9525.....	▼52 7/8 (1345)	1/2 (12.5/13)	36°
7640.....	▼64 5/8 (1640)	3/8 (9.5/10)	36°	9530.....	▼53 3/8 (1355)	1/2 (12.5/13)	36°
7650.....	▼65 5/8 (1665)	3/8 (9.5/10)	36°	9540.....	▼54 3/8 (1380)	1/2 (12.5/13)	36°
7660.....	▼66 5/8 (1690)	3/8 (9.5/10)	36°	9545.....	▼54 7/8 (1395)	1/2 (12.5/13)	36°
7665.....	▼67 1/8 (1705)	3/8 (9.5/10)	36°	9550.....	▼55 3/8 (1405)	1/2 (12.5/13)	36°
7673.....	▼67 5/8 (1720)	3/8 (9.5/10)	36°	9555.....	▼55 7/8 (1420)	1/2 (12.5/13)	36°
7680.....	▼68 5/8 (1745)	3/8 (9.5/10)	36°	9560.....	▼56 3/8 (1430)	1/2 (12.5/13)	36°
7695.....	▼70 1/8 (1780)	3/8 (9.5/10)	36°	9565.....	▼57 1/8 (1450)	1/2 (12.5/13)	36°
7715.....	▼72 1/8 (1830)	3/8 (9.5/10)	36°	9570.....	▼57 3/8 (1455)	1/2 (12.5/13)	36°
7730.....	▼73 5/8 (1870)	3/8 (9.5/10)	36°	9580.....	▼58 3/8 (1485)	1/2 (12.5/13)	36°
7743.....	▼74 5/8 (1895)	3/8 (9.5/10)	36°	9585.....	▼58 7/8 (1495)	1/2 (12.5/13)	36°
7760.....	▼76 5/8 (1945)	3/8 (9.5/10)	36°	9590.....	▼59 3/8 (1510)	1/2 (12.5/13)	36°
7775.....	▼78 1/8 (1985)	3/8 (9.5/10)	36°	9600.....	▼60 3/8 (1535)	1/2 (12.5/13)	36°
9245.....	▼24 7/8 (630)	1/2 (12.5/13)	36°	9605.....	▼60 7/8 (1545)	1/2 (12.5/13)	36°
9255.....	▼26 (660)	1/2 (12.5/13)	36°	9610.....	▼61 3/8 (1560)	1/2 (12.5/13)	36°
9260.....	▼26 3/8 (670)	1/2 (12.5/13)	36°	9620.....	▼62 3/8 (1585)	1/2 (12.5/13)	36°
9265.....	▼26 7/8 (685)	1/2 (12.5/13)	36°	9625.....	▼62 7/8 (1595)	1/2 (12.5/13)	36°
9270.....	▼27 3/8 (695)	1/2 (12.5/13)	36°	9630.....	▼63 3/8 (1610)	1/2 (12.5/13)	36°
9279.....	▼28 1/2 (721)	1/2 (12.5/13)	36°	9635.....	▼64 1/8 (1630)	1/2 (12.5/13)	36°
9290.....	▼29 3/8 (745)	1/2 (12.5/13)	36°	9640.....	▼64 3/8 (1635)	1/2 (12.5/13)	36°
9295.....	▼29 7/8 (760)	1/2 (12.5/13)	36°	9650.....	▼65 3/8 (1660)	1/2 (12.5/13)	36°
9300.....	▼30 3/8 (770)	1/2 (12.5/13)	36°	9660.....	▼66 3/8 (1685)	1/2 (12.5/13)	36°
9305.....	▼30 7/8 (785)	1/2 (12.5/13)	36°	9670.....	▼67 3/8 (1710)	1/2 (12.5/13)	36°
9309.....	▼31 3/8 (795)	1/2 (12.5/13)	36°	9680.....	▼68 3/8 (1735)	1/2 (12.5/13)	36°
9313.....	▼31 7/8 (810)	1/2 (12.5/13)	36°	9690.....	▼69 3/8 (1760)	1/2 (12.5/13)	36°
9319.....	▼32 3/8 (820)	1/2 (12.5/13)	36°	9700.....	▼70 3/8 (1790)	1/2 (12.5/13)	36°
9325.....	▼32 7/8 (835)	1/2 (12.5/13)	36°	9710.....	▼71 3/8 (1815)	1/2 (12.5/13)	36°
9330.....	▼33 3/8 (850)	1/2 (12.5/13)	36°	9720.....	▼72 3/8 (1840)	1/2 (12.5/13)	36°
9335.....	▼33 7/8 (860)	1/2 (12.5/13)	36°	9730.....	▼73 3/8 (1865)	1/2 (12.5/13)	36°
9341.....	▼34 3/8 (875)	1/2 (12.5/13)	36°	9740.....	▼74 3/8 (1890)	1/2 (12.5/13)	36°
9345.....	▼34 7/8 (885)	1/2 (12.5/13)	36°	9745.....	▼74 7/8 (1900)	1/2 (12.5/13)	36°
9350.....	▼35 3/8 (900)	1/2 (12.5/13)	36°	9755.....	▼75 7/8 (1925)	1/2 (12.5/13)	36°
9355.....	▼35 7/8 (910)	1/2 (12.5/13)	36°	9765.....	▼76 7/8 (1955)	1/2 (12.5/13)	36°
9360.....	▼36 3/8 (925)	1/2 (12.5/13)	36°	9770.....	▼77 3/8 (1965)	1/2 (12.5/13)	36°
9365.....	▼36 7/8 (935)	1/2 (12.5/13)	36°	9775.....	▼77 7/8 (1980)	1/2 (12.5/13)	36°
9370.....	▼37 3/8 (950)	1/2 (12.5/13)	36°	9810.....	▼81 3/8 (2065)	1/2 (12.5/13)	36°
9375.....	▼37 7/8 (960)	1/2 (12.5/13)	36°	9820.....	▼82 3/8 (2090)	1/2 (12.5/13)	36°
9378.....	▼38 1/8 (970)	1/2 (12.5/13)	36°	9830.....	▼83 3/8 (2120)	1/2 (12.5/13)	36°
9380.....	▼38 3/8 (975)	1/2 (12.5/13)	36°	9840.....	▼84 3/8 (2145)	1/2 (12.5/13)	36°
9385.....	▼38 7/8 (985)	1/2 (12.5/13)	36°	9850.....	▼85 3/8 (2170)	1/2 (12.5/13)	36°


XL® Belts

Listed by Width and Length


Showing Nominal Belt Top Widths, Outside Lengths and Angles with Our Corresponding Belt Numbers

IMPORTANT: Lengths shown (O.C. is Outside Circumference) are obtained by measuring around the outside of the belt. These lengths will not agree exactly with the size significant belt numbering system which is based on the effective length of the belt. Effective length ("engineered" length) cannot be measured in the field because special tools are required.

Automotive Top Widths are the standard sizes defined by the automotive belt industry (SAE J636). Due to manufacturing processes that create "Vertical Flats", the top width of XL and Truck/Bus series V-Belts will not agree with the printed top width dimensions. Top width on this page and on the belt sleeve refers to the pulley groove width and not the actual top width of these belts. A picture of a V-Belt with "Vertical Flats" is shown below. Actual top width of like belt sizes will also vary slightly depending on the manufacturer and belt style.



Competitive V-Belt



Our V-Belts with
"Vertical Flats"

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
1/4" (6 mm) Top Width (HC25)			3/8" (9.5/10 mm) Top Width (HC41)			3/8" (9.5/10 mm) Top Width (HC41) - Continued		
26 1/4 (665).....	36°	7261	22 1/8 (560).....	36°	▼7215	45 5/8 (1160).....	36°	▼7450
28 1/4 (720).....	36°	7279	24 5/8 (625).....	36°	▼7240	45 7/8 (1165).....	36°	▼7453
30 1/4 (770).....	38°	7298	25 5/8 (650).....	36°	▼7250	46 1/8 (1170).....	36°	▼7455
31 1/4 (795).....	38°	7309	26 1/8 (665).....	36°	▼7255	46 5/8 (1185).....	36°	▼7460
32 1/4 (820).....	38°	7318	26 5/8 (675).....	36°	▼7260	47 1/8 (1195).....	36°	▼7465
33 1/4 (845).....	38°	7329	27 1/8 (690).....	36°	▼7265	47 5/8 (1210).....	36°	▼7470
34 1/4 (870).....	38°	7333	27 5/8 (700).....	36°	▼7270	47 7/8 (1215).....	36°	▼7473
35 1/4 (895).....	38°	7348	28 5/8 (725).....	36°	▼7280	48 1/8 (1220).....	36°	▼7475
36 1/4 (920).....	38°	7359	29 5/8 (750).....	36°	▼7290	48 5/8 (1235).....	36°	▼7480
36 3/4 (935).....	38°	7363	29 7/8 (760).....	36°	▼7292	48 7/8 (1240).....	36°	▼7483
38 1/4 (970).....	38°	7381	30 1/8 (765).....	36°	▼7295	49 1/8 (1250).....	36°	▼7485
39 1/4 (995).....	38°	7388	30 5/8 (780).....	36°	▼7300	49 5/8 (1260).....	36°	▼7490
41 1/4 (1050).....	38°	7409	31 5/8 (805).....	36°	▼7312	50 1/8 (1275).....	36°	▼7495
5/16" (8 mm) Top Width (HC31)			32 1/8 (815).....	36°	▼7315	50 5/8 (1285).....	36°	▼7500
23 (585).....	36°	7228	32 5/8 (830).....	36°	▼7320	51 1/8 (1300).....	36°	▼7508
23 3/4 (605).....	38°	7234	33 1/8 (840).....	36°	▼7325	51 5/8 (1310).....	36°	▼7512
27 1/4 (690).....	38°	7274	33 3/8 (850).....	36°	▼7328	52 1/8 (1325).....	36°	▼7516
30 3/4 (780).....	36°	7304	33 5/8 (855).....	36°	▼7330	52 5/8 (1335).....	36°	▼7520
32 3/4 (830).....	38°	7324	34 1/8 (865).....	36°	▼7335	53 1/8 (1350).....	36°	▼7525
33 3/4 (855).....	38°	7334	34 5/8 (880).....	36°	▼7340	53 5/8 (1360).....	36°	▼7530
34 1/4 (870).....	38°	7343	35 1/8 (890).....	36°	▼7345	54 1/8 (1375).....	36°	▼7535
36 1/2 (925).....	38°	7362	35 5/8 (905).....	36°	▼7350	54 5/8 (1385).....	36°	▼7541
37 1/4 (945).....	38°	7369	36 1/4 (920).....	36°	▼7355	55 1/8 (1400).....	36°	▼7545
37 3/4 (960).....	38°	7374	36 5/8 (930).....	36°	▼7360	55 5/8 (1415).....	36°	▼7550
38 1/4 (970).....	38°	7379	37 1/8 (945).....	36°	▼7365	56 1/8 (1425).....	36°	▼7555
38 3/4 (985).....	38°	7384	37 5/8 (955).....	36°	▼7370	56 5/8 (1440).....	36°	▼7560
39 1/4 (995).....	38°	7389	38 1/8 (970).....	36°	▼7375	57 1/8 (1450).....	36°	▼7565
40 3/4 (1035).....	38°	7404	38 5/8 (980).....	36°	▼7380	57 5/8 (1465).....	36°	▼7570
42 1/4 (1075).....	38°	7419	39 1/8 (995).....	36°	▼7385	58 1/8 (1475).....	36°	▼7575
44 3/4 (1135).....	38°	7444	39 5/8 (1005).....	36°	▼7390	58 5/8 (1490).....	36°	▼7580
45 1/4 (1150).....	38°	7449	40 1/8 (1020).....	36°	▼7395	59 1/8 (1500).....	36°	▼7585
46 1/4 (1175).....	38°	7459	40 5/8 (1030).....	36°	▼7400	59 5/8 (1515).....	36°	▼7590
49 5/8 (1260).....	38°	7496	41 1/8 (1045).....	36°	▼7405	60 1/8 (1525).....	36°	▼7597
			41 5/8 (1055).....	36°	▼7410	60 5/8 (1540).....	36°	▼7603
			42 1/8 (1070).....	36°	▼7417	61 5/8 (1565).....	36°	▼7612
			42 5/8 (1080).....	36°	▼7420	62 5/8 (1590).....	36°	▼7619
			43 1/8 (1095).....	36°	▼7425	63 1/8 (1605).....	36°	▼7625
			43 5/8 (1110).....	36°	▼7430	63 5/8 (1615).....	36°	▼7630
			44 1/8 (1120).....	36°	▼7435	64 5/8 (1640).....	36°	▼7640
			44 5/8 (1135).....	36°	▼7440	65 5/8 (1665).....	36°	▼7650
			45 1/8 (1145).....	36°	▼7445	66 5/8 (1690).....	36°	▼7660

▼ Indicates Notched Belt.

(mm) Millimeters

XL® Belts Listed by Width and Length

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
3/8" (9.5/10 mm) Top Width (HC41) - Continued			1/2" (12.5/13 mm) Top Width (HC50) - Continued			1/2" (12.5/13 mm) Top Width (HC50) - Continued		
67 1/8 (1705).....	36°	▼7665	34 7/8 (885).....	36°	▼9345	54 3/8 (1380).....	36°	▼9540
67 5/8 (1720).....	36°	▼7673	35 3/8 (900).....	36°	▼9350	54 7/8 (1395).....	36°	▼9545
68 5/8 (1745).....	36°	▼7680	35 7/8 (910).....	36°	▼9355	55 3/8 (1405).....	36°	▼9550
70 1/8 (1780).....	36°	▼7695	36 3/8 (925).....	36°	▼9360	55 7/8 (1420).....	36°	▼9555
72 1/8 (1830).....	36°	▼7715	36 7/8 (935).....	36°	▼9365	56 3/8 (1430).....	36°	▼9560
73 5/8 (1870).....	36°	▼7730	37 3/8 (950).....	36°	▼9370	57 1/8 (1450).....	36°	▼9565
74 5/8 (1895).....	36°	▼7743	37 7/8 (960).....	36°	▼9375	57 3/8 (1455).....	36°	▼9570
76 5/8 (1945).....	36°	▼7760	38 1/8 (970).....	36°	▼9378	58 3/8 (1485).....	36°	▼9580
78 1/8 (1985).....	36°	▼7775	38 3/8 (975).....	36°	▼9380	58 7/8 (1495).....	36°	▼9585
13/32" (9.5/10 mm) Top Width (HC41)			1/2" (12.5/13 mm) Top Width (HC50)			1/2" (12.5/13 mm) Top Width (HC50)		
21 1/4 (540).....	36°	▼7208	39 3/8 (1000).....	36°	▼9390	59 3/8 (1510).....	36°	▼9590
31 1/4 (795).....	36°	▼7305	39 7/8 (1015).....	36°	▼9395	60 3/8 (1535).....	36°	▼9600
45 3/8 (1155).....	36°	▼7448	40 3/8 (1025).....	36°	▼9400	60 7/8 (1545).....	36°	▼9605
1/2" (12.5/13 mm) Top Width (HC50)			1/2" (12.5/13 mm) Top Width (HC50)			1/2" (12.5/13 mm) Top Width (HC50)		
24 7/8 (630).....	36°	▼9245	40 5/8 (1030).....	36°	▼9403	61 3/8 (1560).....	36°	▼9610
26 (660).....	36°	▼9255	40 7/8 (1040).....	36°	▼9405	62 3/8 (1585).....	36°	▼9620
26 3/8 (670).....	36°	▼9260	41 3/8 (1050).....	36°	▼9412	62 7/8 (1595).....	36°	▼9625
26 7/8 (685).....	36°	▼9265	41 7/8 (1065).....	36°	▼9415	63 3/8 (1610).....	36°	▼9630
27 3/8 (695).....	36°	▼9270	42 3/8 (1075).....	36°	▼9420	64 1/8 (1630).....	36°	▼9635
28 1/2 (721).....	36°	▼9279	42 7/8 (1090).....	36°	▼9425	64 3/8 (1635).....	36°	▼9640
29 3/8 (745).....	36°	▼9290	43 3/8 (1100).....	36°	▼9430	65 3/8 (1660).....	36°	▼9650
29 7/8 (760).....	36°	▼9295	43 7/8 (1115).....	36°	▼9435	66 3/8 (1685).....	36°	▼9660
30 3/8 (770).....	36°	▼9300	44 3/8 (1125).....	36°	▼9440	67 3/8 (1710).....	36°	▼9670
30 7/8 (785).....	36°	▼9305	44 7/8 (1140).....	36°	▼9447	68 3/8 (1735).....	36°	▼9680
31 3/8 (795).....	36°	▼9309	45 3/8 (1155).....	36°	▼9451	69 3/8 (1760).....	36°	▼9690
31 7/8 (810).....	36°	▼9313	45 7/8 (1165).....	36°	▼9455	70 3/8 (1790).....	36°	▼9700
32 3/8 (820).....	36°	▼9319	46 3/8 (1180).....	36°	▼9463	71 3/8 (1815).....	36°	▼9710
32 7/8 (835).....	36°	▼9325	46 7/8 (1190).....	36°	▼9465	72 3/8 (1840).....	36°	▼9720
33 3/8 (850).....	36°	▼9330	47 3/8 (1205).....	36°	▼9470	73 3/8 (1865).....	36°	▼9730
33 7/8 (860).....	36°	▼9335	47 7/8 (1215).....	36°	▼9476	74 3/8 (1890).....	36°	▼9740
34 3/8 (875).....	36°	▼9341	48 3/8 (1230).....	36°	▼9480	74 7/8 (1900).....	36°	▼9745
			48 7/8 (1240).....	36°	▼9485	75 7/8 (1925).....	36°	▼9755
			49 3/8 (1255).....	36°	▼9490	76 7/8 (1955).....	36°	▼9765
			49 5/8 (1260).....	36°	▼9495	77 3/8 (1965).....	36°	▼9770
			50 3/8 (1280).....	36°	▼9500	77 7/8 (1980).....	36°	▼9775
			50 7/8 (1290).....	36°	▼9505	81 3/8 (2065).....	36°	▼9810
			51 3/8 (1305).....	36°	▼9510	82 3/8 (2090).....	36°	▼9820
			52 3/8 (1330).....	36°	▼9520	83 3/8 (2120).....	36°	▼9830
			52 7/8 (1345).....	36°	▼9525	84 3/8 (2145).....	36°	▼9840
			53 3/8 (1355).....	36°	▼9530	85 3/8 (2170).....	36°	▼9850

▼ Indicates Notched Belt.

(mm) Millimeters

FleetRunner™ Micro-V® Belts

Listed by Number

Showing Our Belt Numbers with Corresponding
Nominal Outside Lengths, Top Widths and Angles

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
K040430HD	43 3/4 (1111)	9/16 (14)	40°	K080694HD	70 (1777)	1 3/32 (28)	40°
K050345HD	35 1/4 (894)	21/32 (17)	40°	K080700HD	70 1/2 (1789)	1 3/32 (28)	40°
K060340HD	34 3/4 (881)	13/16 (20)	40°	K080702HD	70 3/4 (1798)	1 3/32 (28)	40°
K060415HD	42 1/8 (1069)	13/16 (20)	40°	K080708HD	71 1/4 (1811)	1 3/32 (28)	40°
K060425HD	43 1/8 (1095)	13/16 (20)	40°	K080716HD	72 1/8 (1831)	1 3/32 (28)	40°
K060435HD	44 1/8 (1122)	13/16 (20)	40°	K080720HD	72 5/8 (1845)	1 3/32 (28)	40°
K060455HD	46 (1170)	13/16 (20)	40°	K080726HD	73 1/4 (1859)	1 3/32 (28)	40°
K060470HD	47 5/8 (1211)	13/16 (20)	40°	K080730HD	73 1/2 (1867)	1 3/32 (28)	40°
K060490HD	49 1/2 (1258)	13/16 (20)	40°	K080733HD	73 3/4 (1874)	1 3/32 (28)	40°
K060559HD	56 1/2 (1436)	13/16 (20)	40°	K080738HD	74 3/8 (1889)	1 3/32 (28)	40°
K060685HD	69 1/8 (1756)	13/16 (20)	40°	K080740HD	74 5/8 (1896)	1 3/32 (28)	40°
K070705HD	71 1/8 (1807)	15/16 (24)	40°	K080745HD	75 1/8 (1907)	1 3/32 (28)	40°
K070735HD	74 1/8 (1883)	15/16 (24)	40°	K080760HD	76 1/2 (1942)	1 3/32 (28)	40°
K080415HD	42 1/8 (1069)	1 3/32 (28)	40°	K080774HD	77 3/4 (1976)	1 3/32 (28)	40°
K080427HD	43 1/2 (1103)	1 3/32 (28)	40°	K080780HD	78 5/8 (1996)	1 3/32 (28)	40°
K080465HD	47 (1195)	1 3/32 (28)	40°	K080825HD	83 1/8 (2112)	1 3/32 (28)	40°
K080485HD	49 1/8 (1249)	1 3/32 (28)	40°	K080830HD	83 3/4 (2127)	1 3/32 (28)	40°
K080496HD	50 1/8 (1274)	1 3/32 (28)	40°	K080839HD	84 3/8 (2144)	1 3/32 (28)	40°
K080510HD	51 1/2 (1309)	1 3/32 (28)	40°	K080855HD	86 1/8 (2187)	1 3/32 (28)	40°
K080545HD	55 1/8 (1399)	1 3/32 (28)	40°	K080893HD	89 7/8 (2282)	1 3/32 (28)	40°
K080560HD	56 5/8 (1439)	1 3/32 (28)	40°	K080922HD	92 3/4 (2355)	1 3/32 (28)	40°
K080565HD	57 (1448)	1 3/32 (28)	40°	K080952HD	95 3/4 (2432)	1 3/32 (28)	40°
K080570HD	57 1/2 (1462)	1 3/32 (28)	40°	K081035HD	104 (2642)	1 3/32 (28)	40°
K080575HD	58 1/8 (1475)	1 3/32 (28)	40°	K081124HD	113 (2869)	1 3/32 (28)	40°
K080580HD	58 5/8 (1490)	1 3/32 (28)	40°	K081223HD	122 3/4 (3117)	1 3/32 (28)	40°
K080585HD	59 (1499)	1 3/32 (28)	40°	K090609HD	61 1/2 (1562)	1 7/32 (31)	40°
K080590HD	59 1/2 (1512)	1 3/32 (28)	40°	K100465HD	47 (1195)	1 3/8 (35)	40°
K080594HD	60 (1523)	1 3/32 (28)	40°	K100540HD	54 1/2 (1385)	1 3/8 (35)	40°
K080605HD	61 1/8 (1553)	1 3/32 (28)	40°	K100570HD	57 1/2 (1462)	1 3/8 (35)	40°
K080610HD	61 3/4 (1569)	1 3/32 (28)	40°	K100607HD	61 1/4 (1557)	1 3/8 (35)	40°
K080630HD	63 5/8 (1616)	1 3/32 (28)	40°	K100640HD	64 5/8 (1642)	1 3/8 (35)	40°
K080672HD	67 3/4 (1722)	1 3/32 (28)	40°	K100655HD	66 (1678)	1 3/8 (35)	40°
K080675HD	68 (1728)	1 3/32 (28)	40°	K100675HD	68 (1728)	1 3/8 (35)	40°
K080680HD	68 5/8 (1742)	1 3/32 (28)	40°	K100731HD	73 5/8 (1871)	1 3/8 (35)	40°
K080685HD	69 1/8 (1756)	1 3/32 (28)	40°	K100771HD	77 3/4 (1976)	1 3/8 (35)	40°
K080690HD	69 5/8 (1767)	1 3/32 (28)	40°	K120911HD	91 3/4 (2329)	1 21/32 (42)	40°

FleetRunner™ Micro-V® Belts

Listed by Width and Length

Showing Nominal Belt Top Widths, Outside Lengths and Angles
with Our Corresponding Belt Numbers

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
9/16" (14 mm) Top Width			1 3/32" (28 mm) Top Width			1 3/32" (28 mm) Top Width		
43 3/4 (1111) 40° K040430HD			- Continued			- Continued		
21/32" (17 mm) Top Width			56 5/8 (1439) 40° K080560HD	83 1/8 (2112) 40° K080825HD				
35 1/4 (894) 40° K050345HD			57 (1448) 40° K080565HD	83 3/4 (2127) 40° K080830HD				
13/16" (20 mm) Top Width			57 1/2 (1462) 40° K080570HD	84 3/8 (2144) 40° K080839HD				
34 3/4 (881) 40° K060340HD			58 1/8 (1475) 40° K080575HD	86 1/8 (2187) 40° K080855HD				
42 1/8 (1069) 40° K060415HD			58 5/8 (1490) 40° K080580HD	89 7/8 (2282) 40° K080893HD				
43 1/8 (1095) 40° K060425HD			59 (1499) 40° K080585HD	92 3/4 (2355) 40° K080922HD				
44 1/8 (1122) 40° K060435HD			59 1/2 (1512) 40° K080590HD	95 3/4 (2432) 40° K080952HD				
46 (1170) 40° K060455HD			60 (1523) 40° K080594HD	104 (2642) 40° K081035HD				
47 5/8 (1211) 40° K060470HD			61 1/8 (1553) 40° K080605HD	113 (2869) 40° K081124HD				
49 1/2 (1258) 40° K060490HD			61 3/4 (1569) 40° K080610HD	122 3/4 (3117) 40° K081223HD				
56 1/2 (1436) 40° K060559HD			63 5/8 (1616) 40° K080630HD	1 7/32" (31 mm) Top Width				
69 1/8 (1756) 40° K060685HD			67 3/4 (1722) 40° K080672HD	61 1/2 (1562) 40° K090609HD				
15/16" (24 mm) Top Width			68 (1728) 40° K080675HD	1 3/8" (35 mm) Top Width				
71 1/8 (1807) 40° K070705HD			68 5/8 (1742) 40° K080680HD	47 (1195) 40° K100465HD				
74 1/8 (1883) 40° K070735HD			69 1/8 (1756) 40° K080685HD	54 1/2 (1385) 40° K100540HD				
1 3/32" (28 mm) Top Width			69 5/8 (1767) 40° K080690HD	57 1/2 (1462) 40° K100570HD				
42 1/8 (1069) 40° K080415HD			70 (1777) 40° K080694HD	61 1/4 (1557) 40° K100607HD				
43 1/2 (1103) 40° K080427HD			70 1/2 (1789) 40° K080700HD	64 5/8 (1642) 40° K100640HD				
47 (1195) 40° K080465HD			70 3/4 (1798) 40° K080702HD	66 (1678) 40° K100655HD				
49 1/8 (1249) 40° K080485HD			71 1/4 (1811) 40° K080708HD	68 (1728) 40° K100675HD				
50 1/8 (1274) 40° K080496HD			72 1/8 (1831) 40° K080716HD	73 5/8 (1871) 40° K100731HD				
51 1/2 (1309) 40° K080510HD			72 5/8 (1845) 40° K080720HD	77 3/4 (1976) 40° K100771HD				
55 1/8 (1399) 40° K080545HD			73 1/4 (1859) 40° K080726HD	1 21/32" (42 mm) Top Width				
			73 1/2 (1867) 40° K080730HD	91 3/4 (2329) 40° K120911HD				
			73 3/4 (1874) 40° K080733HD					
			74 3/8 (1889) 40° K080738HD					
			74 5/8 (1896) 40° K080740HD					
			75 1/8 (1907) 40° K080745HD					
			76 1/2 (1942) 40° K080760HD					
			77 3/4 (1976) 40° K080774HD					
			78 5/8 (1996) 40° K080780HD					

(mm) Millimeters

FleetRunner™ Heavy-Duty V-Belts

Listed by Number

Showing Our Belt Numbers with Corresponding
Nominal Outside Lengths, Top Widths and Angles

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
9290HD	▼29 3/8 (746)	1/2 (13)	36°	9495HD	▼49 29/32 (1268)	1/2 (13)	36°
9305HD	▼30 7/8 (784)	1/2 (13)	36°	9500HD	▼50 7/16 (1281)	1/2 (13)	36°
9313HD	▼31 7/8 (810)	1/2 (13)	36°	9505HD	▼50 7/8 (1292)	1/2 (13)	36°
9325HD	▼32 7/8 (835)	1/2 (13)	36°	9510HD	▼51 3/8 (1305)	1/2 (13)	36°
9330HD	▼33 3/8 (848)	1/2 (13)	36°	9520HD	▼52 7/16 (1332)	1/2 (13)	36°
9335HD	▼33 29/32 (862)	1/2 (13)	36°	9525HD	▼52 7/8 (1343)	1/2 (13)	36°
9341HD	▼34 3/8 (873)	1/2 (13)	36°	9530HD	▼53 7/16 (1357)	1/2 (13)	36°
9345HD	▼34 7/8 (886)	1/2 (13)	36°	9540HD	▼54 3/8 (1382)	1/2 (13)	36°
9350HD	▼35 15/32 (901)	1/2 (13)	36°	9545HD	▼54 27/32 (1393)	1/2 (13)	36°
9360HD	▼36 3/8 (924)	1/2 (13)	36°	9550HD	▼55 13/32 (1408)	1/2 (13)	36°
9365HD	▼36 7/8 (936)	1/2 (13)	36°	9555HD	▼55 27/32 (1418)	1/2 (13)	36°
9370HD	▼37 3/8 (950)	1/2 (13)	36°	9560HD	▼56 13/32 (1433)	1/2 (13)	36°
9375HD	▼37 15/16 (963)	1/2 (13)	36°	9565HD	▼56 27/32 (1443)	1/2 (13)	36°
9380HD	▼38 3/8 (975)	1/2 (13)	36°	9570HD	▼57 13/32 (1458)	1/2 (13)	36°
9385HD	▼38 29/32 (989)	1/2 (13)	36°	9580HD	▼58 3/8 (1483)	1/2 (13)	36°
9390HD	▼39 3/8 (1000)	1/2 (13)	36°	9585HD	▼58 7/8 (1496)	1/2 (13)	36°
9395HD	▼39 29/32 (1013)	1/2 (13)	36°	9590HD	▼59 13/32 (1509)	1/2 (13)	36°
9400HD	▼40 3/8 (1026)	1/2 (13)	36°	9600HD	▼60 13/32 (1534)	1/2 (13)	36°
9403HD	▼40 5/8 (1032)	1/2 (13)	36°	9605HD	▼60 31/32 (1549)	1/2 (13)	36°
9405HD	▼40 27/32 (1038)	1/2 (13)	36°	9610HD	▼61 7/16 (1561)	1/2 (13)	36°
9412HD	▼41 3/8 (1051)	1/2 (13)	36°	9620HD	▼62 3/8 (1584)	1/2 (13)	36°
9415HD	▼41 29/32 (1065)	1/2 (13)	36°	9625HD	▼62 7/8 (1597)	1/2 (13)	38°
9420HD	▼42 11/32 (1075)	1/2 (13)	36°	9630HD	▼63 13/32 (1610)	1/2 (13)	36°
9425HD	▼42 27/32 (1088)	1/2 (13)	36°	9635HD	▼63 29/32 (1623)	1/2 (13)	36°
9430HD	▼43 7/16 (1103)	1/2 (13)	36°	9640HD	▼64 3/8 (1635)	1/2 (13)	36°
9435HD	▼43 7/8 (1115)	1/2 (13)	36°	9650HD	▼65 3/8 (1661)	1/2 (13)	36°
9440HD	▼44 3/8 (1127)	1/2 (13)	36°	9660HD	▼66 3/8 (1686)	1/2 (13)	36°
9447HD	▼44 27/32 (1139)	1/2 (13)	36°	9670HD	▼67 3/8 (1712)	1/2 (13)	36°
9451HD	▼45 7/16 (1154)	1/2 (13)	36°	9680HD	▼68 3/8 (1737)	1/2 (13)	36°
9455HD	▼45 27/32 (1165)	1/2 (13)	36°	9690HD	▼69 3/8 (1762)	1/2 (13)	36°
9463HD	▼46 3/8 (1178)	1/2 (13)	36°	9700HD	▼70 3/8 (1788)	1/2 (13)	36°
9465HD	▼46 27/32 (1190)	1/2 (13)	36°	9710HD	▼71 3/8 (1813)	1/2 (13)	36°
9470HD	▼47 3/8 (1203)	1/2 (13)	36°	9720HD	▼72 3/8 (1838)	1/2 (13)	36°
9476HD	▼47 15/16 (1218)	1/2 (13)	36°	9730HD	▼73 11/32 (1863)	1/2 (13)	36°
9480HD	▼48 15/32 (1231)	1/2 (13)	36°	9745HD	▼74 7/8 (1900)	1/2 (13)	38°
9485HD	▼48 27/32 (1240)	1/2 (13)	36°	9755HD	▼75 15/16 (1929)	1/2 (13)	36°
9490HD	▼49 3/8 (1254)	1/2 (13)	36°				

▼ Indicates Notched Belt.

(mm) Millimeters

FleetRunner™ Heavy-Duty V-Belts

Listed by Width and Length

Showing Nominal Belt Top Widths, Outside Lengths and Angles
with Our Corresponding Belt Numbers

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
1/2" (13 mm) Top Width (HC50)			1/2" (13 mm) Top Width (HC50) - Continued			1/2" (13 mm) Top Width (HC50) - Continued		
29 3/8 (746)	36°	▼9290HD	43 7/8 (1115)	36°	▼9435HD	57 13/32 (1458)	36°	▼9570HD
30 7/8 (784)	36°	▼9305HD	44 3/8 (1127)	36°	▼9440HD	58 3/8 (1483)	36°	▼9580HD
31 7/8 (810)	36°	▼9313HD	44 27/32 (1139)	36°	▼9447HD	58 7/8 (1496)	36°	▼9585HD
32 7/8 (835)	36°	▼9325HD	45 7/16 (1154)	36°	▼9451HD	59 13/32 (1509)	36°	▼9590HD
33 3/8 (848)	36°	▼9330HD	45 27/32 (1165)	36°	▼9455HD	60 13/32 (1534)	36°	▼9600HD
33 29/32 (862)	36°	▼9335HD	46 3/8 (1178)	36°	▼9463HD	60 31/32 (1549)	36°	▼9605HD
34 3/8 (873)	36°	▼9341HD	46 27/32 (1190)	36°	▼9465HD	61 7/16 (1561)	36°	▼9610HD
34 7/8 (886)	36°	▼9345HD	47 3/8 (1203)	36°	▼9470HD	62 3/8 (1584)	36°	▼9620HD
35 15/32 (901)	36°	▼9350HD	47 15/16 (1218)	36°	▼9476HD	62 7/8 (1597)	38°	▼9625HD
36 3/8 (924)	36°	▼9360HD	48 15/32 (1231)	36°	▼9480HD	63 13/32 (1610)	36°	▼9630HD
36 7/8 (936)	36°	▼9365HD	48 27/32 (1240)	36°	▼9485HD	63 29/32 (1623)	36°	▼9635HD
37 3/8 (950)	36°	▼9370HD	49 3/8 (1254)	36°	▼9490HD	64 3/8 (1635)	36°	▼9640HD
37 15/16 (963)	36°	▼9375HD	49 29/32 (1268)	36°	▼9495HD	65 3/8 (1661)	36°	▼9650HD
38 3/8 (975)	36°	▼9380HD	50 7/16 (1281)	36°	▼9500HD	66 3/8 (1686)	36°	▼9660HD
38 29/32 (989)	36°	▼9385HD	50 7/8 (1292)	36°	▼9505HD	67 3/8 (1712)	36°	▼9670HD
39 3/8 (1000)	36°	▼9390HD	51 3/8 (1305)	36°	▼9510HD	68 3/8 (1737)	36°	▼9680HD
39 29/32 (1013)	36°	▼9395HD	52 7/16 (1332)	36°	▼9520HD	69 3/8 (1762)	36°	▼9690HD
40 3/8 (1026)	36°	▼9400HD	52 7/8 (1343)	36°	▼9525HD	70 3/8 (1788)	36°	▼9700HD
40 5/8 (1032)	36°	▼9403HD	53 7/16 (1357)	36°	▼9530HD	71 3/8 (1813)	36°	▼9710HD
40 27/32 (1038)	36°	▼9405HD	54 3/8 (1382)	36°	▼9540HD	72 3/8 (1838)	36°	▼9720HD
41 3/8 (1051)	36°	▼9412HD	54 27/32 (1393)	36°	▼9545HD	73 11/32 (1863)	36°	▼9730HD
41 29/32 (1065)	36°	▼9415HD	55 13/32 (1408)	36°	▼9550HD	74 7/8 (1900)	38°	▼9745HD
42 11/32 (1075)	36°	▼9420HD	55 27/32 (1418)	36°	▼9555HD	75 15/16 (1929)	36°	▼9755HD
42 27/32 (1088)	36°	▼9425HD	56 13/32 (1433)	36°	▼9560HD			
43 7/16 (1103)	36°	▼9430HD	56 27/32 (1443)	36°	▼9565HD			

▼ Indicates Notched Belt.


(mm) Millimeters

Green Stripe® Truck & Bus V-Belts Listed by Number


Showing Our Belt Numbers with Corresponding Nominal Outside Lengths, Top Widths and Angles

IMPORTANT: Lengths shown (O.C. is Outside Circumference) are obtained by measuring around the outside of the belt. These lengths will not agree exactly with the size significant belt numbering system which is based on the effective length of the belt. Effective length ("engineered" length) cannot be measured in the field because special tools are required.

Automotive Top Widths are the standard sizes defined by the automotive belt industry (SAE J636). Due to manufacturing processes that create "Vertical Flats", the top width of XL and Truck/Bus series V-Belts will not agree with the printed top width dimensions. Top width on this page and on the belt sleeve refers to the pulley groove width and not the actual top width of these belts. A picture of a V-Belt with "Vertical Flats" is shown below. Actual top width of like belt sizes will also vary slightly depending on the manufacturer and belt style.



Competitive V-Belt



Our V-Belts with
"Vertical Flats"

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
TR20412.....	41 5/8 (1055)	5/8 (16)	36°	TR22588.....	59 3/8 (1510)	11/16 (17)	36°
TR20426.....	43 (1090)	5/8 (16)	36°	TR22607.....	61 1/4 (1555)	11/16 (17)	36°
TR20451.....	45 1/2 (1150)	5/8 (16)	36°	TR22625.....	63 1/8 (1605)	11/16 (17)	36°
TR20544.....	54 3/4 (1390)	5/8 (16)	36°	TR22635.....	64 1/8 (1630)	11/16 (17)	36°
TR20619.....	62 3/8 (1585)	5/8 (16)	36°	TR22648.....	65 3/8 (1660)	11/16 (17)	36°
TR22299.....	30 1/2 (775)	11/16 (17)	36°	TR22657.....	66 1/8 (1680)	11/16 (17)	36°
TR22322.....	32 3/4 (830)	11/16 (17)	36°	TR22664.....	67 1/8 (1705)	11/16 (17)	36°
TR22329.....	33 1/2 (845)	11/16 (17)	36°	TR22676.....	68 1/8 (1730)	11/16 (17)	36°
TR22336.....	34 1/4 (870)	11/16 (17)	36°	TR22692.....	69 3/4 (1770)	11/16 (17)	36°
TR22344.....	34 7/8 (885)	11/16 (17)	36°	TR22711.....	71 5/8 (1820)	11/16 (17)	36°
TR22350.....	35 5/8 (905)	11/16 (17)	36°	TR22720.....	72 5/8 (1845)	11/16 (17)	36°
TR22358.....	36 3/8 (925)	11/16 (17)	36°	TR22752.....	75 3/4 (1925)	11/16 (17)	36°
TR22363.....	36 7/8 (935)	11/16 (17)	36°	TR22770.....	77 5/8 (1970)	11/16 (17)	36°
TR22373.....	37 7/8 (960)	11/16 (17)	36°	TR22792.....	79 3/8 (2015)	11/16 (17)	36°
TR22380.....	38 1/2 (980)	11/16 (17)	36°	TR24281.....	28 3/4 (730)	3/4 (19)	36°
TR22386.....	39 1/4 (995)	11/16 (17)	36°	TR24308.....	31 3/8 (795)	3/4 (19)	36°
TR22392.....	39 3/4 (1005)	11/16 (17)	36°	TR24315.....	32 (815)	3/4 (19)	36°
TR22397.....	40 1/4 (1020)	11/16 (17)	36°	TR24355.....	36 1/8 (920)	3/4 (19)	36°
TR22401.....	40 3/4 (1035)	11/16 (17)	36°	TR24365.....	37 1/8 (945)	3/4 (19)	36°
TR22405.....	41 1/8 (1045)	11/16 (17)	36°	TR24379.....	38 1/2 (980)	3/4 (19)	36°
TR22410.....	41 5/8 (1055)	11/16 (17)	36°	TR24400.....	40 5/8 (1030)	3/4 (19)	36°
TR22416.....	42 1/4 (1075)	11/16 (17)	36°	TR24403.....	40 7/8 (1040)	3/4 (19)	36°
TR22425.....	43 1/8 (1095)	11/16 (17)	36°	TR24407.....	41 1/4 (1050)	3/4 (19)	36°
TR22434.....	44 (1120)	11/16 (17)	36°	TR24414.....	42 (1065)	3/4 (19)	36°
TR22443.....	44 7/8 (1140)	11/16 (17)	36°	TR24424.....	43 (1090)	3/4 (19)	36°
TR22448.....	45 3/8 (1155)	11/16 (17)	36°	TR24438.....	44 3/8 (1125)	3/4 (19)	36°
TR22455.....	46 (1170)	11/16 (17)	36°	TR24449.....	45 1/2 (1155)	3/4 (19)	36°
TR22461.....	46 5/8 (1185)	11/16 (17)	36°	TR24457.....	46 1/4 (1175)	3/4 (19)	36°
TR22474.....	48 (1220)	11/16 (17)	36°	TR24461.....	46 3/4 (1185)	3/4 (19)	36°
TR22485.....	49 1/8 (1250)	11/16 (17)	36°	TR24465.....	47 1/8 (1195)	3/4 (19)	36°
TR22495.....	50 1/4 (1265)	11/16 (17)	36°	TR24476.....	48 1/4 (1225)	3/4 (19)	36°
TR22508.....	51 3/8 (1305)	11/16 (17)	36°	TR24489.....	49 1/2 (1255)	3/4 (19)	36°
TR22514.....	52 (1320)	11/16 (17)	36°	TR24500.....	50 5/8 (1285)	3/4 (19)	36°
TR22517.....	52 1/2 (1335)	11/16 (17)	36°	TR24515.....	52 (1320)	3/4 (19)	36°
TR22525.....	53 1/8 (1350)	11/16 (17)	36°	TR24530.....	53 5/8 (1360)	3/4 (19)	36°
TR22534.....	54 (1370)	11/16 (17)	36°	TR24538.....	54 3/8 (1380)	3/4 (19)	36°
TR22545.....	55 1/8 (1400)	11/16 (17)	36°	TR24562.....	56 5/8 (1440)	3/4 (19)	36°
TR22553.....	55 7/8 (1420)	11/16 (17)	36°	TR24578.....	58 3/8 (1485)	3/4 (19)	36°
TR22570.....	57 5/8 (1465)	11/16 (17)	36°	TR24597.....	60 1/4 (1530)	3/4 (19)	36°
TR22578.....	58 1/4 (1480)	11/16 (17)	36°	TR24607.....	61 3/8 (1560)	3/4 (19)	36°

(mm) Millimeters

Green Stripe® Truck & Bus V-Belts Listed By Number


Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
TR24619	62 1/2 (1590)	3/4 (19)	36°	TR28628	63 3/8 (1610)	7/8 (22)	36°
TR24638	64 1/4 (1630)	3/4 (19)	36°	TR28649	65 1/2 (1665)	7/8 (22)	36°
TR24647	65 1/4 (1655)	3/4 (19)	36°	TR28657	66 1/8 (1680)	7/8 (22)	36°
TR24664	67 1/8 (1705)	3/4 (19)	36°	TR28666	67 1/4 (1710)	7/8 (22)	36°
TR24688	69 3/8 (1760)	3/4 (19)	36°	TR28680	68 5/8 (1745)	7/8 (22)	36°
TR24709	71 1/4 (1810)	3/4 (19)	36°	TR28693	69 7/8 (1775)	7/8 (22)	36°
TR26341	34 1/2 (875)	13/16 (21)	36°	TR28706	71 1/8 (1805)	7/8 (22)	36°
TR26353	35 3/4 (910)	13/16 (21)	36°	TR28733	73 7/8 (1875)	7/8 (22)	36°
TR26366	37 1/8 (945)	13/16 (21)	36°	TR28743	74 7/8 (1900)	7/8 (22)	36°
TR28333	33 7/8 (860)	7/8 (22)	36°	TR28786	79 1/8 (2010)	7/8 (22)	36°
TR28346	35 1/8 (890)	7/8 (22)	36°	TR30408	41 1/4 (1050)	15/16 (24)	36°
TR28376	38 1/4 (970)	7/8 (22)	36°	TR30428	43 1/4 (1100)	15/16 (24)	36°
TR28386	39 1/4 (995)	7/8 (22)	36°	TR30448	45 1/4 (1150)	15/16 (24)	36°
TR28390	39 5/8 (1005)	7/8 (22)	36°	TR30467	47 1/8 (1195)	15/16 (24)	36°
TR28400	40 5/8 (1030)	7/8 (22)	36°	TR30484	48 7/8 (1240)	15/16 (24)	36°
TR28406	41 1/8 (1045)	7/8 (22)	36°	TR30506	51 (1295)	15/16 (24)	36°
TR28412	41 3/4 (1060)	7/8 (22)	36°	TR30537	54 1/8 (1375)	15/16 (24)	36°
TR28423	42 7/8 (1090)	7/8 (22)	36°	TR30543	54 5/8 (1385)	15/16 (24)	36°
TR28429	43 1/2 (1105)	7/8 (22)	36°	TR30589	59 1/4 (1505)	15/16 (24)	36°
TR28437	44 1/4 (1125)	7/8 (22)	36°	TR30624	62 3/4 (1595)	15/16 (24)	36°
TR28445	45 1/8 (1145)	7/8 (22)	36°	TR30652	65 5/8 (1665)	15/16 (24)	36°
TR28454	46 (1170)	7/8 (22)	36°	TR30672	67 5/8 (1720)	15/16 (24)	36°
TR28463	46 7/8 (1190)	7/8 (22)	36°	TR30698	70 3/8 (1790)	15/16 (24)	36°
TR28473	47 7/8 (1215)	7/8 (22)	36°	TR30710	71 3/8 (1815)	15/16 (24)	36°
TR28480	48 5/8 (1235)	7/8 (22)	36°	TR30722	72 3/4 (1850)	15/16 (24)	36°
TR28483	48 7/8 (1240)	7/8 (22)	36°	TR30754	75 3/4 (1925)	15/16 (24)	36°
TR28492	49 7/8 (1265)	7/8 (22)	36°	TR30770	77 (1955)	15/16 (24)	36°
TR28498	50 3/8 (1280)	7/8 (22)	36°	TR30808	81 1/8 (2060)	15/16 (24)	36°
TR28501	50 7/8 (1290)	7/8 (22)	36°	TR32491	49 3/4 (1265)	1 (25)	36°
TR28510	51 5/8 (1310)	7/8 (22)	36°	TR32513	51 7/8 (1320)	1 (25)	36°
TR28514	52 (1320)	7/8 (22)	36°	TR32571	57 5/8 (1465)	1 (25)	36°
TR28522	53 (1345)	7/8 (22)	36°	TR34435	43 7/8 (1115)	1 1/16 (27)	36°
TR28545	55 1/8 (1400)	7/8 (22)	36°	TR34456	46 (1170)	1 1/16 (27)	36°
TR28550	55 5/8 (1415)	7/8 (22)	36°	TR34467	47 (1195)	1 1/16 (27)	36°
TR28557	56 1/4 (1430)	7/8 (22)	36°	TR34495	49 7/8 (1265)	1 1/16 (27)	36°
TR28565	57 1/8 (1445)	7/8 (22)	36°	TR34506	51 1/8 (1300)	1 1/16 (27)	36°
TR28570	57 5/8 (1465)	7/8 (22)	36°	TR34545	55 (1395)	1 1/16 (27)	36°
TR28575	58 1/8 (1475)	7/8 (22)	36°	TR34604	60 7/8 (1545)	1 1/16 (27)	36°
TR28583	58 7/8 (1495)	7/8 (22)	36°	TR34700	70 3/8 (1790)	1 1/16 (27)	36°
TR28596	60 1/4 (1530)	7/8 (22)	36°	TR34711	71 1/2 (1815)	1 1/16 (27)	36°
TR28616	62 1/4 (1580)	7/8 (22)	36°	TR34771	77 1/2 (1970)	1 1/16 (27)	36°

Green Stripe® Truck & Bus V-Belts Listed by Width and Length


Showing Nominal Belt Top Widths, Outside Lengths and Angles
with Our Corresponding Belt Numbers

IMPORTANT: Lengths shown (O.C. is Outside Circumference) are obtained by measuring around the outside of the belt. These lengths will not agree exactly with the size significant belt numbering system which is based on the effective length of the belt. Effective length ("engineered" length) cannot be measured in the field because special tools are required.

Automotive Top Widths are the standard sizes defined by the automotive belt industry (SAE J636). Due to manufacturing processes that create "Vertical Flats", the top width of XL and Truck/Bus series V-Belts will not agree with the printed top width dimensions. Top width on this page and on the belt sleeve refers to the pulley groove width and not the actual top width of these belts. A picture of a V-Belt with "Vertical Flats" is shown below. Actual top width of like belt sizes will also vary slightly depending on the manufacturer and belt style.



Competitive V-Belt



Our V-Belts with
"Vertical Flats"

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
5/8" (16 mm) Top Width			11/16" (17 mm) Top Width - Continued			3/4" (19 mm) Top Width - Continued		
41 5/8 (1055).....	36°	TR20412	55 1/8 (1400).....	36°	TR22545	48 1/4 (1225).....	36°	TR24476
43 (1090).....	36°	TR20426	55 7/8 (1420).....	36°	TR22553	49 1/2 (1255).....	36°	TR24489
45 1/2 (1150).....	36°	TR20451	57 5/8 (1465).....	36°	TR22570	50 5/8 (1285).....	36°	TR24500
54 3/4 (1390).....	36°	TR20544	58 1/4 (1480).....	36°	TR22578	52 (1320).....	36°	TR24515
62 3/8 (1585).....	36°	TR20619	59 3/8 (1510).....	36°	TR22588	53 5/8 (1360).....	36°	TR24530
11/16" (17 mm) Top Width			61 1/4 (1555).....	36°	TR22607	54 3/8 (1380).....	36°	TR24538
30 1/2 (775).....	36°	TR22299	63 1/8 (1605).....	36°	TR22625	56 5/8 (1440).....	36°	TR24562
32 3/4 (830).....	36°	TR22322	64 1/8 (1630).....	36°	TR22635	58 3/8 (1485).....	36°	TR24578
33 1/2 (845).....	36°	TR22329	65 3/8 (1660).....	36°	TR22648	60 1/4 (1530).....	36°	TR24597
34 1/4 (870).....	36°	TR22336	66 1/8 (1680).....	36°	TR22657	61 3/8 (1560).....	36°	TR24607
34 7/8 (885).....	36°	TR22344	67 1/8 (1705).....	36°	TR22664	62 1/2 (1590).....	36°	TR24619
35 5/8 (905).....	36°	TR22350	68 1/8 (1730).....	36°	TR22676	64 1/4 (1630).....	36°	TR24638
36 3/8 (925).....	36°	TR22358	69 3/4 (1770).....	36°	TR22692	65 1/4 (1655).....	36°	TR24647
36 7/8 (935).....	36°	TR22363	71 5/8 (1820).....	36°	TR22711	67 1/8 (1705).....	36°	TR24664
37 7/8 (960).....	36°	TR22373	72 5/8 (1845).....	36°	TR22720	69 3/8 (1760).....	36°	TR24688
38 1/2 (980).....	36°	TR22380	75 3/4 (1925).....	36°	TR22752	71 1/4 (1810).....	36°	TR24709
39 1/4 (995).....	36°	TR22386	77 5/8 (1970).....	36°	TR22770	13/16" (21 mm) Top Width		
39 3/4 (1005).....	36°	TR22392	79 3/8 (2015).....	36°	TR22792	34 1/2 (875).....	36°	TR26341
40 1/4 (1020).....	36°	TR22397	3/4" (19 mm) Top Width			35 3/4 (910).....	36°	TR26353
40 3/4 (1035).....	36°	TR22401	28 3/4 (730).....	36°	TR24281	37 1/8 (945).....	36°	TR26366
41 1/8 (1045).....	36°	TR22405	31 3/8 (795).....	36°	TR24308	7/8" (22 mm) Top Width		
41 5/8 (1055).....	36°	TR22410	32 (815).....	36°	TR24315	33 7/8 (860).....	36°	TR28333
42 1/4 (1075).....	36°	TR22416	36 1/8 (920).....	36°	TR24355	35 1/8 (890).....	36°	TR28346
43 1/8 (1095).....	36°	TR22425	37 1/8 (945).....	36°	TR24365	38 1/4 (970).....	36°	TR28376
44 (1120).....	36°	TR22434	38 1/2 (980).....	36°	TR24379	39 1/4 (995).....	36°	TR28386
44 7/8 (1140).....	36°	TR22443	40 5/8 (1030).....	36°	TR24400	39 5/8 (1005).....	36°	TR28390
45 3/8 (1155).....	36°	TR22448	40 7/8 (1040).....	36°	TR24403	40 5/8 (1030).....	36°	TR28400
46 (1170).....	36°	TR22455	41 1/4 (1050).....	36°	TR24414	41 1/8 (1045).....	36°	TR28406
46 5/8 (1185).....	36°	TR22461	42 (1065).....	36°	TR24414	41 3/4 (1060).....	36°	TR28412
48 (1220).....	36°	TR22474	43 (1090).....	36°	TR24424	42 7/8 (1090).....	36°	TR28423
49 1/8 (1250).....	36°	TR22485	44 3/8 (1125).....	36°	TR24438	43 1/2 (1105).....	36°	TR28429
50 1/4 (1265).....	36°	TR22495	45 1/2 (1155).....	36°	TR24449	44 1/4 (1125).....	36°	TR28437
51 3/8 (1305).....	36°	TR22508	46 1/4 (1175).....	36°	TR24457	45 1/8 (1145).....	36°	TR28445
52 (1320).....	36°	TR22514	46 3/4 (1185).....	36°	TR24461			
52 1/2 (1335).....	36°	TR22517	47 1/8 (1195).....	36°	TR24465			
53 1/8 (1350).....	36°	TR22525						
54 (1370).....	36°	TR22534						

(mm) Millimeters


Green Stripe® Truck & Bus V-Belts Listed By Width & Length

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
7/8" (22 mm) Top Width - Continued			7/8" (22 mm) Top Width - Continued			15/16" (24 mm) Top Width - Continued		
46 (1170).....	36°	TR28454	68 5/8 (1745).....	36°	TR28680	75 3/4 (1925).....	36°	TR30754
46 7/8 (1190).....	36°	TR28463	69 7/8 (1775).....	36°	TR28693	77 (1955).....	36°	TR30770
47 7/8 (1215).....	36°	TR28473	71 1/8 (1805).....	36°	TR28706	81 1/8 (2060).....	36°	TR30808
48 5/8 (1235).....	36°	TR28480	73 7/8 (1875).....	36°	TR28733	1" (25 mm) Top Width		
48 7/8 (1240).....	36°	TR28483	74 7/8 (1900).....	36°	TR28743	49 3/4 (1265).....	36°	TR32491
49 7/8 (1265).....	36°	TR28492	79 1/8 (2010).....	36°	TR28786	51 7/8 (1320).....	36°	TR32513
50 3/8 (1280).....	36°	TR28498	15/16" (24 mm) Top Width			57 5/8 (1465).....	36°	TR32571
50 7/8 (1290).....	36°	TR28501	41 1/4 (1050).....	36°	TR30408	1 1/16" (27 mm) Top Width		
51 5/8 (1310).....	36°	TR28510	43 1/4 (1100).....	36°	TR30428	43 7/8 (1115).....	36°	TR34435
52 (1320).....	36°	TR28514	45 1/4 (1150).....	36°	TR30448	46 (1175).....	36°	TR34456
53 (1345).....	36°	TR28522	47 1/8 (1195).....	36°	TR30467	47 (1195).....	36°	TR34467
55 1/8 (1400).....	36°	TR28545	48 7/8 (1240).....	36°	TR30484	49 7/8 (1265).....	36°	TR34495
55 5/8 (1415).....	36°	TR28550	51 (1295).....	36°	TR30506	51 1/8 (1300).....	36°	TR34506
56 1/4 (1430).....	36°	TR28557	54 1/8 (1375).....	36°	TR30537	55 (1395).....	36°	TR34545
57 1/8 (1445).....	36°	TR28565	54 5/8 (1385).....	36°	TR30543	60 7/8 (1545).....	36°	TR34604
57 5/8 (1465).....	36°	TR28570	59 1/4 (1505).....	36°	TR30589	70 3/8 (1790).....	36°	TR34700
58 1/8 (1475).....	36°	TR28575	62 3/4 (1595).....	36°	TR30624	71 1/2 (1815).....	36°	TR34711
58 7/8 (1495).....	36°	TR28583	65 5/8 (1665).....	36°	TR30652	77 1/2 (1970).....	36°	TR34771
60 1/4 (1530).....	36°	TR28596	67 5/8 (1720).....	36°	TR30672			
62 1/4 (1580).....	36°	TR28616	70 3/8 (1790).....	36°	TR30698			
63 3/8 (1610).....	36°	TR28628	71 3/8 (1815).....	36°	TR30710			
65 1/2 (1665).....	36°	TR28649	72 3/4 (1850).....	36°	TR30722			
66 1/8 (1680).....	36°	TR28657						
67 1/4 (1710).....	36°	TR28666						

Green Stripe® Truck & Bus PowerBand® Belts Listed by Number

Showing Our Belt Numbers with
Corresponding Nominal Outside Lengths,
Top Widths and Template Color

IMPORTANT: When using PowerBand® belts, make sure that ALL pulleys within the drive can use a PowerBand® by using the appropriate PowerBand® belt template. The use of the correct template is essential for proper fit. The appropriate template for each belt can be determined from the size list below. Refer to the product page in the front of this catalog for detailed instructions on correct fit of the templates in the pulley grooves. The lengths shown (O.C. is Outside Circumference) are obtained by measuring around the outside of the belt.

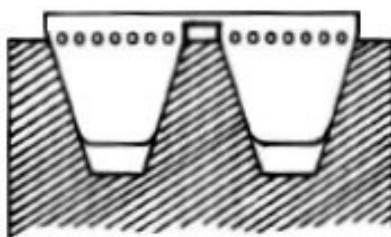


Our Belt No.	Top Width Per Strand Inches (mm)	Length Inches (mm)	Template Color	Our Belt No.	Top Width Per Strand Inches (mm)	Length Inches (mm)	Template Color
2/9305PB	1/2 (12.7)	31 17/32 (801)	YELLOW	2/9650PB	1/2 (12.7)	65 3/8 (1660)	YELLOW
2/9313PB	1/2 (12.7)	32 3/16 (818)	YELLOW	2/9660PB	1/2 (12.7)	66 3/8 (1685)	YELLOW
2/9325PB	1/2 (12.7)	33 17/32 (851)	YELLOW	2/9670PB	1/2 (12.7)	67 3/8 (1710)	YELLOW
2/9430PB	1/2 (12.7)	43 7/8 (1110)	YELLOW	2/9690PB	1/2 (12.7)	69 3/4 (1770)	YELLOW
2/9435PB	1/2 (12.7)	44 3/8 (1125)	YELLOW	2/9700PB	1/2 (12.7)	70 7/8 (1800)	YELLOW
2/9447PB	1/2 (12.7)	45 3/8 (1150)	YELLOW	2/9710PB	1/2 (12.7)	71 3/4 (1820)	YELLOW
2/9451PB	1/2 (12.7)	45 27/32 (1164)	YELLOW	2/9720PB	1/2 (12.7)	72 1/4 (1835)	YELLOW
2/9463PB	1/2 (12.7)	46 7/8 (1190)	YELLOW	2/9730PB	1/2 (12.7)	73 3/8 (1865)	YELLOW
2/9470PB	1/2 (12.7)	47 7/8 (1215)	YELLOW	3/9470PB	1/2 (12.7)	47 1/2 (1206)	
2/9476PB	1/2 (12.7)	48 3/8 (1230)	YELLOW	3/9500PB	1/2 (12.7)	50 5/8 (1286)	
2/9485FPB				3/9525PB	1/2 (12.7)	53 1/8 (1349)	
(FORD ONLY).....				3/9530PB	1/2 (12.7)	53 1/2 (1359)	
2/9490PB	1/2 (12.7)	49 1/4 (1250)	PINK	2/TR22517PB	11/16 (17)	52 1/2 (1333)	GREEN
2/9500PB	1/2 (12.7)	49 3/4 (1265)	YELLOW	2/TR22553PB	11/16 (17)	56 (1425)	GREEN
2/9500PB	1/2 (12.7)	50 7/8 (1292)	YELLOW	2/TR22570PB	11/16 (17)	57 5/8 (1465)	GREEN
2/9510PB	1/2 (12.7)	51 27/32 (1316)	YELLOW	2/TR28400PB	7/8 (22.23)	40 1/2 (1030)	RED
2/9520PB	1/2 (12.7)	52 3/8 (1330)	YELLOW	2/TR28411PB	7/8 (22.23)	41 7/8 (1061)	RED
2/9530PB	1/2 (12.7)	53 3/4 (1365)	YELLOW	2/TR28429PB	7/8 (22.23)	43 1/2 (1105)	RED
2/9540PB	1/2 (12.7)	54 3/4 (1390)	YELLOW	2/TR28437PB	7/8 (22.23)	44 1/4 (1125)	RED
2/9545PB	1/2 (12.7)	55 1/4 (1405)	YELLOW	2/TR28466PB	7/8 (22.23)	47 1/8 (1198)	RED
2/9550PB	1/2 (12.7)	55 3/4 (1415)	YELLOW	2/TR28473PB	7/8 (22.23)	47 7/8 (1215)	RED
2/9555PB	1/2 (12.7)	56 1/2 (1435)	YELLOW	2/TR28480PB	7/8 (22.23)	48 5/8 (1235)	RED
2/9570PB	1/2 (12.7)	57 3/4 (1465)	YELLOW	2/TR28483PB	7/8 (22.23)	48 7/8 (1240)	RED
2/9590PB	1/2 (12.7)	59 3/4 (1520)	YELLOW	2/TR28492PB	7/8 (22.23)	49 7/8 (1265)	RED
2/9600PB	1/2 (12.7)	60 5/8 (1540)	YELLOW	2/TR28501PB	7/8 (22.23)	50 3/4 (1290)	RED
2/9610PB	1/2 (12.7)	61 3/4 (1570)	YELLOW	2/TR28510PB	7/8 (22.23)	51 5/8 (1310)	RED
2/9640PB	1/2 (12.7)	64 3/8 (1635)	YELLOW				

Green Stripe® Truck & Bus PowerBand® Belts Listed by Width and Length

**Showing Nominal Belt Top Widths, Outside Lengths and
Template Color with Our Corresponding Belt Numbers**

IMPORTANT: When using PowerBand® belts, make sure that ALL pulleys within the drive can use a PowerBand® by using the appropriate PowerBand® belt template. The use of the correct template is essential for proper fit. The appropriate template for each belt can be determined from the size list below. Refer to the product page in the front of this catalog for detailed instructions on correct fit of the templates in the pulley grooves. The lengths shown (O.C. is Outside Circumference) are obtained by measuring around the outside of the belt.

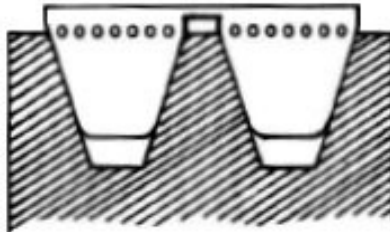

Length Inches (mm)	Template Color	Our Belt No.	Length Inches (mm)	Template Color	Our Belt No.	Length Inches (mm)	Template Color	Our Belt No.
1/2" (12.7 mm) Per Strand Top Width			1/2" (12.7 mm) Per Strand Top Width - Continued			11/16" (17 mm) Per Strand Top Width		
31 17/32 (801).....	YELLOW	2/9305PB	53 3/4 (1365).....	YELLOW	2/9530PB	52 1/2 (1333).....	GREEN	2/TR22517PB
32 3/16 (818).....	YELLOW	2/9313PB	54 3/4 (1390).....	YELLOW	2/9540PB	56 (1425).....	GREEN	2/TR22553PB
33 17/32 (851).....	YELLOW	2/9325PB	55 1/4 (1405).....	YELLOW	2/9545PB	57 5/8 (1465).....	GREEN	2/TR22570PB
43 7/8 (1110).....	YELLOW	2/9430PB	55 3/4 (1415).....	YELLOW	2/9550PB	7/8" (22.23 mm) Per Strand Top Width		
44 3/8 (1125).....	YELLOW	2/9435PB	56 1/2 (1435).....	YELLOW	2/9555PB	40 1/2 (1030).....	RED	2/TR28400PB
45 3/8 (1150).....	YELLOW	2/9447PB	57 3/4 (1465).....	YELLOW	2/9570PB	41 7/8 (1061).....	RED	2/TR28411PB
45 27/32 (1164).....	YELLOW	2/9451PB	59 3/4 (1520).....	YELLOW	2/9590PB	43 1/2 (1105).....	RED	2/TR28429PB
46 7/8 (1190).....	YELLOW	2/9463PB	60 5/8 (1540).....	YELLOW	2/9600PB	44 1/4 (1125).....	RED	2/TR28437PB
47 1/2 (1206).....		3/9470PB	61 3/4 (1570).....	YELLOW	2/9610PB	47 1/8 (1198).....	RED	2/TR28466PB
47 7/8 (1215).....	YELLOW	2/9470PB	64 3/8 (1635).....	YELLOW	2/9640PB	47 7/8 (1215).....	RED	2/TR28473PB
48 3/8 (1230).....	YELLOW	2/9476PB	65 3/8 (1660).....	YELLOW	2/9650PB	48 5/8 (1235).....	RED	2/TR28480PB
49 1/4 (1250).....	PINK	2/9485FPB	66 3/8 (1685).....	YELLOW	2/9660PB	48 7/8 (1240).....	RED	2/TR28483PB
49 3/4 (1265).....	YELLOW	2/9490PB	67 3/8 (1710).....	YELLOW	2/9670PB	49 7/8 (1265).....	RED	2/TR28492PB
50 5/8 (1286).....		3/9500PB	69 3/4 (1770).....	YELLOW	2/9690PB	50 3/4 (1290).....	RED	2/TR28501PB
50 7/8 (1292).....	YELLOW	2/9500PB	70 7/8 (1800).....	YELLOW	2/9700PB	51 5/8 (1310).....	RED	2/TR28510PB
51 27/32 (1316).....	YELLOW	2/9510PB	71 3/4 (1820).....	YELLOW	2/9710PB			
52 3/8 (1330).....	YELLOW	2/9520PB	72 1/4 (1835).....	YELLOW	2/9720PB			
53 1/8 (1349).....		3/9525PB	73 3/8 (1865).....	YELLOW	2/9730PB			
53 1/2 (1359).....		3/9530PB						

(mm) Millimeters

Special Belts Listed by Number

Showing Our Belt Numbers with Corresponding
Nominal Outside Lengths, Top Widths and Angles

Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Top Width Inches (mm)	Angle
811.....	★22 1/2 (570)	1 1/8 (28)		5740.....	54 (1370)	1/2 (12.5/13)	36°
813.....	★26 3/4 (680)	1 1/8 (28)		5741.....	36 1/2 (925)	1/2 (12.5/13)	36°
814.....	★31 1/2 (800)	1 1/8 (28)		5742.....	44 3/4 (1135)	1/2 (12.5/13)	36°
822.....	★36 (915)	1 (25)		5743.....	43 7/8 (1115)	1/2 (12.5/13)	36°
5500.....	56 1/4 (1430)	13/16 (20)	38°	5744.....	53 3/8 (1355)	1/2 (12.5/13)	36°
5501.....	71 (1805)	13/16 (20)	38°	6183.....	★15 1/2 (395)	5/16 (8)	
5502.....	64 3/4 (1645)	13/16 (20)	38°	6224.....	▼48 3/8 (1229)	1/2 (13)	42°
5503.....	52 (1320)	13/16 (20)	38°	6234.....	◇71 1/2 (1815)	1/2 (12.5/13)	36°
5504.....	65 (1650)	13/16 (20)	38°	6354 (180 TEETH)	♣56 3/4 (1440)	25/32 (20)	
5506.....	132 (3355)	21/32 (16)	40°	6370.....	31 7/8 (810)	1/2 (12.5/13)	37°
5508.....	59 (1500)	3/8 (9.5/10)	39°	6372.....	38 3/4 (985)	1/2 (12.5/13)	40°
5509.....	81 (2055)	3/8 (9.5/10)	40°	6375.....	◇74 3/8 (1890)	1/2 (12.5/13)	36°
5510.....	▼35 1/8 (890)	1/2 (12.5/13)	38°	6376.....	36 3/4 (935)	1/2 (12.5/13)	40°
5511.....	54 (1370)	13/16 (20)	38°	6377.....	79 3/4 (2025)	1/2 (12.5/13)	40°
5512.....	67 1/8 (1705)	13/16 (20)	38°	6378.....	103 1/4 (2625)	1/2 (12.5/13)	40°
5513.....	55 (1395)	13/16 (20)	38°	6379.....	108 1/8 (2745)	1/2 (12.5/13)	40°
5515.....	81 7/8 (2080)	21/32 (16.5)	38°	6380.....	25 3/8 (645)	3/8 (9.5/10)	37°
5516.....	◇58 1/2 (1485)	1/2 (12.5/13)	36°	6384 (153 TEETH)	♣48 1/4 (1225)	1 (25)	
5517.....	93 5/8 (2430)	1/2 (12.5/13)	40°	6385 (140 TEETH)	♣44 1/8 (1120)	1 (25)	
5518.....	▼93 1/8 (2365)	1/2 (12.5/13)	38°	6386 (130 TEETH)	♣41 (1040)	1 (25)	
5519.....	▼31 5/8 (805)	1/2 (12.5/13)	38°	6387.....	127 1/8 (3230)	1/2 (13)	40°
5520.....	53 (1345)	13/16 (20)	40°	6389.....	49 1/8 (1245)	1/4 (6)	42°
5521.....	50 (1270)	13/16 (20)	40°	6390.....	34 3/8 (873)	3/8 (9.5/10)	38°
5522.....	60 1/2 (1535)	13/16 (20)	40°	6391.....	32 1/2 (825)	1/4 (6)	42°
5523.....	164 (4165)	21/32 (16.5)	40°	6392.....	32 (815)	1/4 (6)	42°
5524.....	115 1/2 (2935)	21/32 (16.5)	40°	6398.....	117 1/8 (2975)	1/2 (12.5/13)	40°
5525.....	118 (2995)	21/32 (16.5)	40°	6413 (65 TEETH)	♣24 3/8 (620)	3/8 (9.5/10)	
5526.....	142 (3605)	21/32 (16.5)	40°	6414 (61 TEETH)	♣22 7/8 (580)	3/8 (9.5/10)	
5527.....	◇53 3/4 (1364)	1/2 (12.5/13)	36°	6421 (68 TEETH)	♣25 1/2 (650)	5/16 (8)	
5528.....	58 (1475)	1/2 (12.5/13)	38°	6548.....	83 1/8 (2110)	1/2 (12.5/13)	39°
5529.....	▼42 7/8 (1090)	21/32 (16.5)	38°	6550.....	120 1/4 (3055)	1/2 (12.5/13)	40°
5530.....	▼67 1/8 (1705)	1/2 (12.5/13)	38°	6556.....	24 3/4 (630)	3/8 (9)	38°
5531.....	▼75 1/2 (1920)	21/32 (16.5)	38°	6560.....	126 1/8 (3205)	1/2 (13)	40°
5533.....	51 7/8 (1320)	21/32 (16.5)	40°	6565.....	107 1/4 (2725)	1/2 (13)	39°
5534.....	69 (1753)	21/32 (16)	38°	6572.....	▼62 7/8 (1590)	1 1/8 (31)	38°
5535.....	155 (3935)	21/32 (16.5)	40°	6574.....	64 1/4 (1630)	1/2 (13)	40°
5536.....	34 1/8 (865)	1/2 (12.5/13)	37°	6575.....	54 1/4 (1377)	1/2 (13)	38°
5537.....	86 7/8 (2205)	21/32 (16.5)	40°	6578.....	69 1/4 (1760)	21/32 (17)	38°
5538.....	113 1/2 (2880)	21/32 (16.5)	40°	6582.....	90 5/8 (2350)	1/2 (13)	40°
5539.....	▼76 7/8 (1955)	1 1/4 (35)	42°	6583.....	34 1/2 (875)	1/2 (12.5/13)	40°
5700.....	68 1/4 (1735)	1/2 (12.5/13)	38°	6589.....	29 3/4 (755)	3/8 (9.5/10)	37°
5701.....	110 1/2 (2805)	1/2 (12.5/13)	40°	6593.....	86 (2185)	1/2 (12.5/13)	39°
5707 (167 TEETH)	♣19 3/4 (500)	19/32 (15)		6596.....	44 (1120)	7/16 (11)	36°
5716 (220 TEETH)	♣69 9/32 (1760)	25/32 (19.8)		6597.....	57 (1450)	7/16 (11)	36°
5718.....	44 5/8 (1135)	1 1/4 (32)	40°	6599.....	▼86 5/8 (2200)	1 15/32 (37)	38°
5723.....	58 3/8 (1485)	1/2 (12.5/13)	36°	6601.....	▼53 (1346)	1 1/8 (29)	38°
5724.....	54 7/8 (1395)	1/2 (12.5/13)	36°	6604.....	157 (3988)	7/8 (22)	40°
5725.....	48 7/8 (1230)	7/16 (11)	36°	6697.....	35 1/2 (900)	3/16 (5)	60°
5726.....	57 3/8 (1455)	1/2 (12.5/13)	36°	6698.....	48 1/32 (1220)	9/32 (7)	60°
5731.....	35 1/2 (900)	3/8 (9.5/10)	36°	BSX680.....	▼68 3/8 (1735)	1/2 (12.5/13)	36°
5732.....	35 3/4 (910)	3/8 (9.5/10)	36°	BSX690.....	▼69 3/8 (1760)	1/2 (12.5/13)	36°
5734.....	45 1/4 (1150)	1/2 (12.5/13)	36°	BSX700.....	▼70 3/8 (1790)	1/2 (12.5/13)	36°
5735.....	37 7/8 (960)	1/2 (12.5/13)	36°	BSX710.....	▼71 3/8 (1815)	1/2 (12.5/13)	36°
5736.....	39 (990)	1/2 (12.5/13)	36°	BSX720.....	▼72 3/8 (1840)	1/2 (12.5/13)	36°
5737.....	48 (1220)	1/2 (12.5/13)	36°	BSX770.....	▼77 3/8 (1965)	1/2 (12.5/13)	36°
5738.....	49 3/8 (1255)	1/2 (12.5/13)	36°				

(mm) Millimeters.
◇ Dubl-V Belt.

★ Flat Belt. Length Given Is Inside Circumference.
♣ Timing Belt. Length Given is Pitch Length.

▼ Indicates Notched Belt.

Special Belts

Listed by Width and Length

Showing Nominal Belt Top Widths, Outside Lengths and Angles
with Our Corresponding Belt Numbers

Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.	Length Inches (mm)	Angle	Our Belt No.
3/16" (5 mm) Top Width			1/2" (12.5/13 mm) Top Width			25/32" (19.8 mm) Top Width		
35 1/2 (900)	60°	6697	- Continued			69 9/32 (1760)		♣5716 (220 TEETH)
1/4" (6 mm) Top Width			58 (1475)	38°	5528	25/32" (20 mm) Top Width		
32 (815)	42°	6392	58 3/8 (1485)	36°	5723	25/32" (20 mm) Top Width		
32 1/2 (825)	42°	6391	58 1/2 (1485)	36°	♣5516	25/32" (20 mm) Top Width		
49 1/8 (1250)	42°	6389	67 1/8 (1705)	38°	▼5530	56 3/4 (1440)		♣6354 (180 TEETH)
9/32" (7 mm) Top Width			68 1/4 (1735)	38°	5700	13/16" (20 mm) Top Width		
48 1/32 (1220)	60°	6698	68 3/8 (1735)	36°	▼BSX680	50 (1270)	40°	5521
5/16" (8 mm) Top Width			69 3/8 (1760)	36°	▼BSX690	52 (1320)	38°	5503
15 1/2 (395)	38°	★6183	70 3/8 (1790)	36°	▼BSX700	53 (1345)	40°	5520
25 1/2 (650)		♣6421 (68 TEETH)	71 3/8 (1815)	36°	▼BSX710	54 (1370)	38°	5511
3/8" (9 mm) Top Width			71 1/2 (1815)	36°	♣6234	55 (1395)	38°	5513
24 3/4 (630)	38°	6556	72 3/8 (1840)	36°	▼BSX720	56 1/4 (1430)	38°	5500
3/8" (9.5/10 mm) Top Width			74 3/8 (1890)	36°	♣6375	60 1/2 (1535)	40°	5522
22 7/8 (580)		♣6414 (61 TEETH)	77 3/8 (1965)	36°	▼BSX770	63 (1600)	38°	5507
24 3/8 (620)		♣6413 (65 TEETH)	79 3/4 (2025)	40°	6377	64 3/4 (1645)	38°	5502
25 3/8 (645)	37°	6380	83 1/8 (2110)	39°	6548	65 (1650)	38°	5504
29 3/4 (755)	37°	6589	86 (2185)	39°	6593	67 1/8 (1705)	38°	5512
34 3/8 (873)	38°	6390	93 1/8 (2365)	38°	▼5518	71 (1805)	38°	5501
35 1/2 (900)	36°	5731	93 5/8 (2430)	40°	5517	7/8" (22 mm) Top Width		
35 3/4 (910)	36°	5732	103 1/4 (2625)	40°	6378	157 (3988)		6604
59 (1500)	39°	5508	108 1/8 (2745)	40°	6379	1" (25 mm) Top Width		
81 (2055)	40°	5509	110 1/2 (2805)	40°	5701	36 (915)		★822
7/16" (11 mm) Top Width			117 1/8 (2975)	40°	6398	41 (1040)		♣6386 (130 TEETH)
44 (1120)	36°	6596	120 1/4 (3055)	40°	6550	44 1/8 (1120)		♣6385 (140 TEETH)
48 7/8 (1230)	36°	5725	1/2" (13 mm) Top Width			48 1/4 (1225)		♣6384 (153 TEETH)
57 (1450)	36°	6597	48 3/8 (1229)	42°	▼6224	1 1/8" (28 mm) Top Width		
1/2" (12.5/13 mm) Top Width			54 1/4 (1377)	38°	6575	22 1/2 (570)		★811
31 5/8 (805)	38°	▼5519	64 1/4 (1630)	40°	6574	26 3/4 (680)		★813
31 7/8 (810)	37°	6370	90 5/8 (2350)	40°	6582	31 1/2 (800)		★814
34 1/8 (865)	37°	5536	107 1/4 (2725)	39°	6565	53 (1346)		▼6601
34 1/2 (875)	40°	6583	126 1/8 (3205)	40°	6560	1 1/8" (31 mm) Top Width		
35 1/8 (890)	38°	▼5510	127 1/8 (3230)	40°	6387	62 7/8 (1590)	38°	▼6572
36 1/2 (925)	36°	5741	19/32" (15 mm) Top Width			1 1/4" (32 mm) Top Width		
36 3/4 (935)	40°	6376	19 3/4 (500)		♣5707 (167 TEETH)	44 5/8 (1135)	40°	5718
37 7/8 (960)	36°	5735	21/32" (16 mm) Top Width			1 1/4" (35 mm) Top Width		
38 3/4 (985)	40°	6372	68 7/8 (1750)	40°	5534	76 7/8 (1955)	42°	▼5539
39 (990)	36°	5736	132 (3355)	40°	5506	1 15/32" (37 mm) Top Width		
43 7/8 (1115)	36°	5743	21/32" (16.5 mm) Top Width			86 5/8 (2200)	38°	▼6599
43 3/4 (1135)	36°	5742	42 7/8 (1090)	38°	▼5529			
45 1/4 (1150)	36°	5734	51 7/8 (1320)	40°	5533			
48 (1220)	36°	5737	69 (1753)	38°	5534			
49 3/8 (1255)	36°	5738	69 1/4 (1760)	38°	6578			
53 3/8 (1355)	36°	5744	75 1/2 (1920)	38°	▼5531			
53 3/4 (1364)	36°	♣5527	81 7/8 (2080)	38°	5515			
54 (1370)	36°	5740	86 7/8 (2205)	40°	5537			
54 7/8 (1395)	36°	5724	113 1/2 (2880)	40°	5538			
57 3/8 (1455)	36°	5726	115 1/2 (2935)	40°	5524			
			118 (2995)	40°	5525			
			142 (3605)	40°	5526			
			155 (3935)	40°	5535			
			164 (4165)	40°	5523			

(mm) Millimeters.
♣ Dubl-V Belt.

★ Flat Belt. Length Given Is Inside Circumference.
♣ Timing Belt. Length Given is Pitch Length.

▼ Indicates Notched Belt.